


Acoustic Summary

PANELS offer a unique acoustic solution for new and existing commercial interiors. Combining excellent acoustic properties within a linear batten application, they are ideal for interiors where sound levels require adjustment.

PANELS have been independently tested and acoustically rated. Please contact us for full reports.

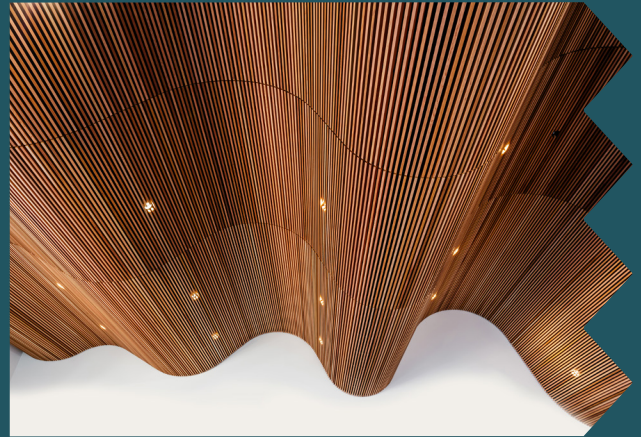

SC15 Acoustic Textile (Included)


PANELS are fitted with SC15 acoustic textile as standard. This acoustic fabric achieves an NRC of up to 0.7* and has been specifically designed to complement the PANELS range. It is available in black only.

SCP50 Acoustic Polyester (Optional)

For outstanding acoustic performance SCP50 (50mm thick acoustic polyester) can be added to achieve an NRC of up to 1.0*. SCP50 is supplied in sheets 1200mm x 2400mm.

Typical Installation with SC15 and SCP50 backings


ceiling panel installation to suspended ceiling system

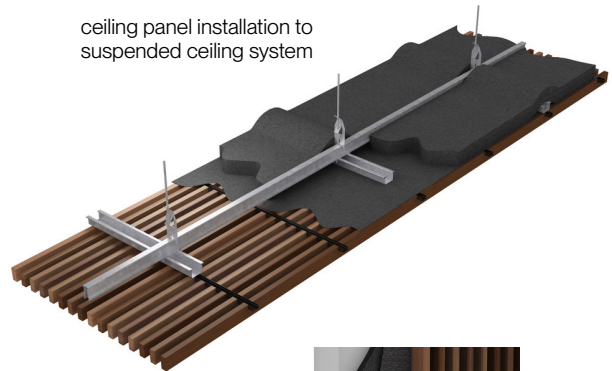

wall panel installation



Sound Absorption of PANELS
tested to AS ISO 354-2006 Acoustics:

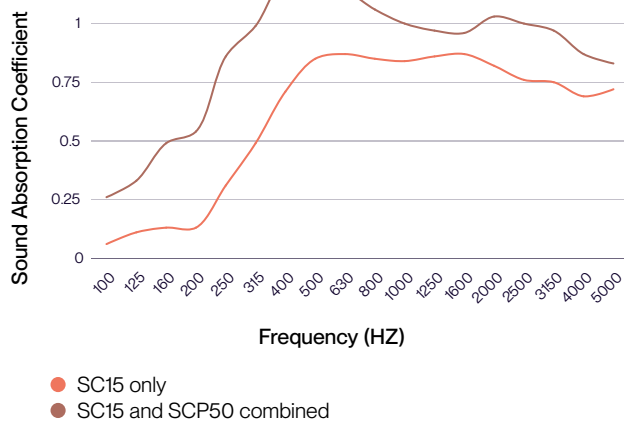


*NRC of the sample calculated in accordance with ASTM C423-90A. Test performed with PANELS profile 4020-8.



Acoustic Summary

PANELS offer a unique acoustic solution for new and existing commercial interiors. Combining excellent acoustic properties within a linear batten application, they are ideal for interiors where sound levels require adjustment.

PANELS have been independently tested and acoustically rated. Please contact us for full reports.

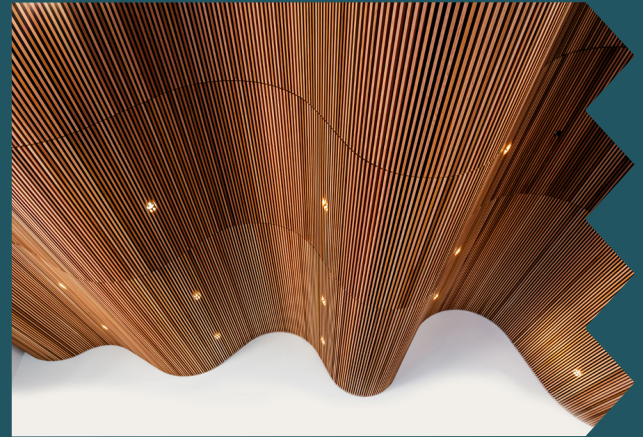


SC15 Acoustic Textile (Included)

PANELS are fitted with SC15 acoustic textile as standard. This acoustic fabric achieves an NRC of up to 0.7* and has been specifically designed to complement the PANELS range. It is available in black only.

SCP50 Acoustic Polyester (Optional)

For outstanding acoustic performance SCP50 (50mm thick acoustic polyester) can be added to achieve an NRC of up to 1.0*. SCP50 is supplied in sheets 1200mm x 2400mm.

Sound Absorption of PANELS
tested to AS ISO 354-2006 Acoustics:

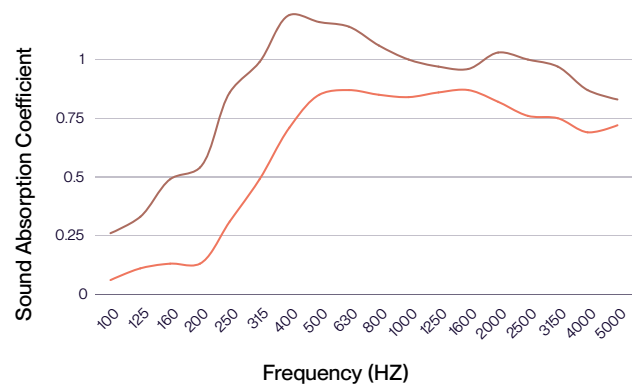


- SC15 only
- SC15 and SCP50 combined

Typical Installation with SC15 and SCP50 backings



wall panel installation

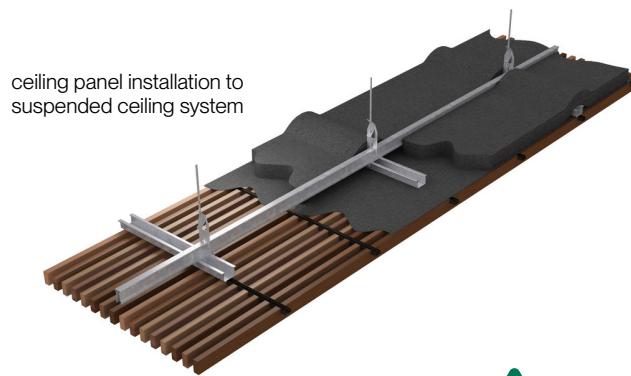

ceiling panel installation to suspended ceiling system

*NRC of the sample calculated in accordance with ASTM C423-90A. Test performed with PANELS profile 4020-8.

