Modulo® Group 1



Arc

For high occupancy or high fire-rated interiors, Modulo[®] Group 1 Arc is outstanding for walls, ceilings and curves achieving a radius of 500mm.



Modulo® Group 1 Arc shown in NAVURBAN™ Byron Blackbutt

How to Specify

Product Screenwood Modulo® Group 1

Application Internal use only

Substrate Aluminium Fire Group 1

Profile Arc

Length Available lengths: 2.7m, 3.6m, 5.4m

Finish Select finish (e.g. NAVURBAN™ Byron Blackbutt)

Certifications

Fire certified

Group 1 fire-rated, tested to AS5637.1.

Global GreenTag™ certified

Global GreenTag[™] certified GreenTag Level B and GreenTag PHD Platinum HEALTH[™].

UV resistant

NAVURBAN™ tested for exposure in indoor applications to ASTM D4459.

Light Reflective Value

NAVURBAN™ tested for exposure in indoor applications to AS/NZS 1428.1.

Resistant to wear

NAVURBAN™ tested for abrasion resistance to AS 1580.

Low VOC

Exceeds GBCA requirements for commercial fitouts. Tested for organic emissions to ASTM D5116-2017.





Test results are available on request.




Version 1



Modulo® Group 1



Arc

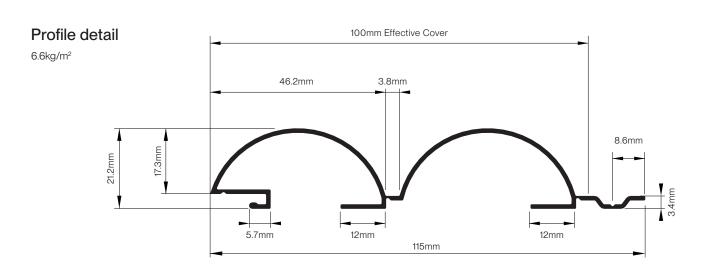


Concave curve

500mm Curve Radius




Convex curve

500mm Curve Radius



Concealed screw installation of Modulo® Group 1

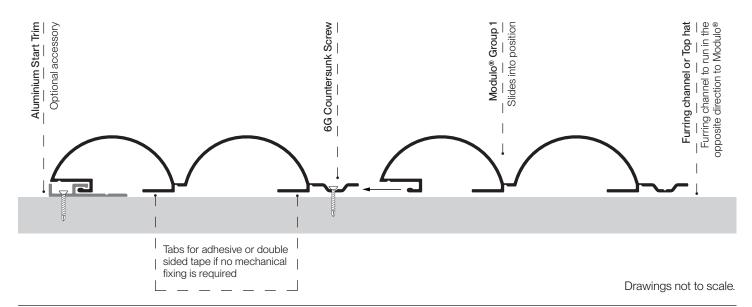





Modulo® Group 1

Arc



Visit screenwood.com.au/finishes



Visit screenwood.com.au/resources

Accessories

- Installation is simple with Screenwood start trim and external corner trim available to fit Modulo® Group 1 providing a professional finish.
- No costly componentry is required and can be combined with aluminium trims (supplied by others) to cap top and bottom edges if required.

Ultra-realistic Finishes

Modulo® is profile wrapped in premium NAVURBAN™ non-PVC olefin decorative film with seamless finish matching across Screenwood and NAVURBAN™ products. Low VOC, UV and abrasion resistant, no ongoing maintenance and a large scale pattern to avoid pattern repeat. For the latest finishes, please visit screenwood.com.au/finishes.

Features

- For interior walls, ceilings and curves of up to 500mm radius
- Group 1 fire rated & Golbal GreenTag[™] certified
- Prefinished in olefin film for an ultra-realistic finish
- Low VOC, UV and abrasion resistant
- Simple to install and no ongoing maintenance
- · Easy to order with a fast manufacturing lead time
- Arrives in recyclable packaging
- Designed and made in Australia by Screenwood



Need to know more? We're here to help.

hello@screenwood.com.au +61 2 9521 7200 screenwood.com.au



