

Batten

For high occupancy or high fire-rated interiors, Modulo® Group 1 Batten is outstanding for walls, ceilings and curves achieving a radius of 500mm.



Modulo® Group 1 Batten shown in
NAVURBAN Diamond™
White Mountain Oak

How to Specify

Product	Screenwood Modulo® Group 1
Application	Internal use only
Substrate	Aluminium
Fire	Group 1
Profile	Batten
Length	Available lengths: 2.7m, 3.6m, 5.4m
Finish	Select finish (e.g. NAVURBAN Diamond™ White Mountain Oak)

Certifications

Fire certified

Group 1 fire-rated, tested to AS5637.1.

UV resistant

NAVURBAN™ tested for exposure in indoor applications to ASTM D4459.

Light Reflective Value

NAVURBAN™ tested for exposure in indoor applications to AS/NZS 1428.1.

Global GreenTag™ certified

Global GreenTag™ certified
GreenTag Level B and GreenTag
PHD Platinum HEALTH™.

Resistant to wear

NAVURBAN™ tested for abrasion resistance to AS 1580.

Low VOC

Exceeds GBCA requirements for commercial fitouts. Tested for organic emissions to ASTM D5116-2017.




Test results are available on request.

Modulo® Group 1

Batten

Profile detail

8.1kg/m²

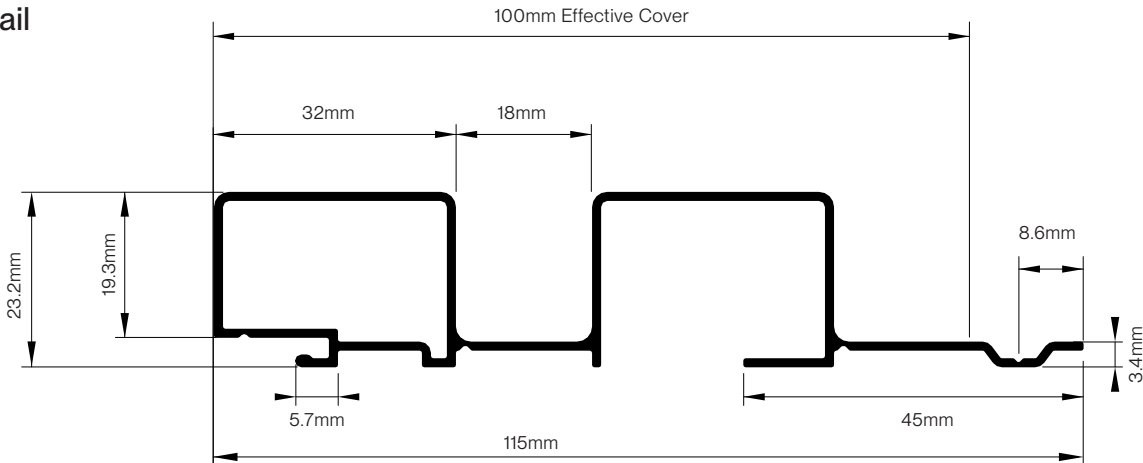


Concave curve

500mm Curve Radius




Convex curve

500mm Curve Radius



Concealed screw installation of Modulo® Group 1

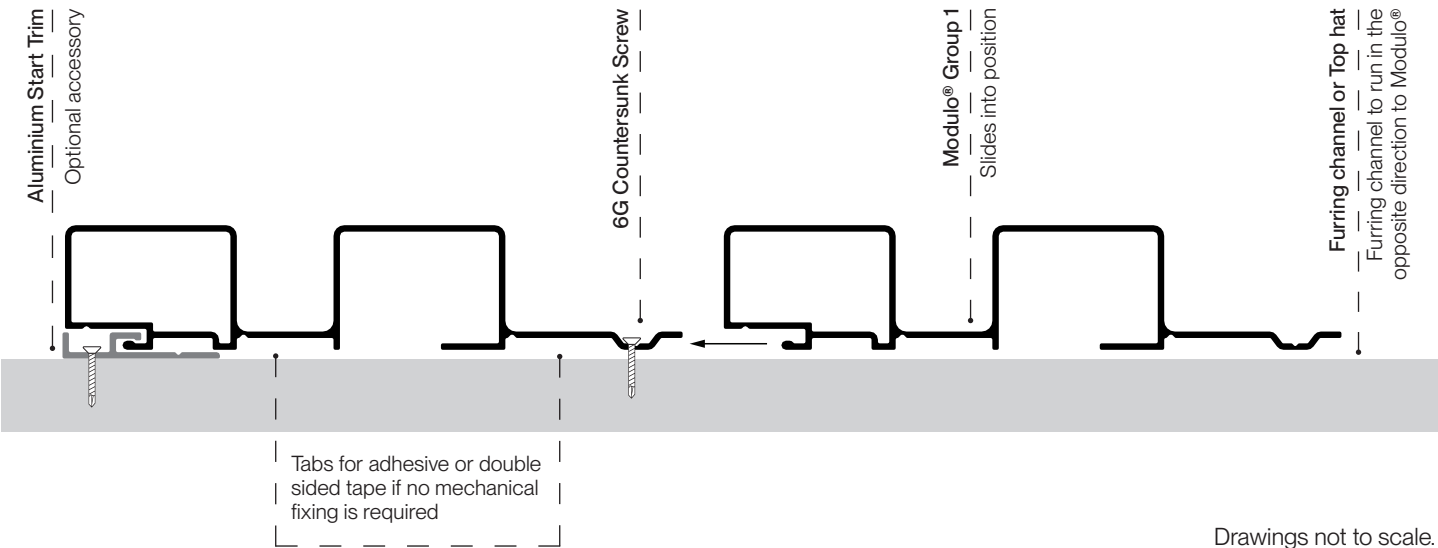

Drawings not to scale.

Batten



Visit screenwood.com.au/finishes

Accessories

- Installation is simple with Screenwood start trim and external corner trim available to fit Modulo® Group 1 providing a professional finish.
- No costly componentry is required and can be combined with aluminium trims (supplied by others) to cap top and bottom edges if required.

Ultra-realistic Finishes

Modulo® is profile wrapped in premium NAVURBAN™ non-PVC olefin decorative film with seamless finish matching across Screenwood and NAVURBAN™ products. Low VOC, UV and abrasion resistant, no ongoing maintenance and a large scale pattern to avoid pattern repeat. For the latest finishes, please visit screenwood.com.au/finishes.

Features

- For interior walls, ceilings and curves of up to 500mm radius
- Group 1 fire rated & Golbal GreenTag™ certified
- Prefinished in olefin film for an ultra-realistic finish
- Low VOC, UV and abrasion resistant
- Simple to install and no ongoing maintenance
- Easy to order with a fast manufacturing lead time
- Arrives in recyclable packaging
- Designed and made in Australia by Screenwood



Visit screenwood.com.au/resources



**Need to know more?
We're here to help.**

hello@screenwood.com.au
+61 2 9521 7200
screenwood.com.au