


MODULO® Group 3  
Profile Specification

## BOARD & BATTEN

Available Lengths	2.7m, 3.6m, 5.4m
Effective Cover	100mm
Max Thickness	32mm
Weight	13.3kg per Sqm
Curve Radius	183mm
Substrate	Decorative Fibreboard
Finish Options	Navurban™, Raw



MODULO is a high quality, simple and cost-effective linear solution for internal wall and ceiling applications. The tongue and groove internal lining boards are available in a range of profiles and supplied prefinished in a wide range of Navurban™ premium decors.

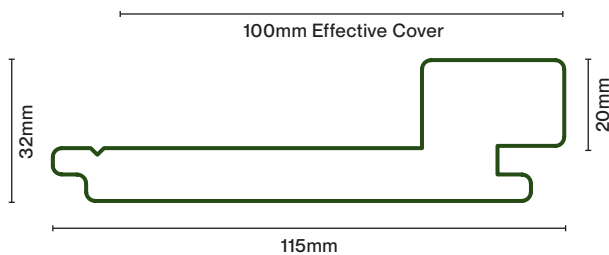

### MODULO® CERTIFICATIONS



**Environment**  
Global GreenTag



**Fire**  
Fire certified to AS5637:1, valid to NCC Vol 1 BCA 2019



**Emissions**  
Low VOC tested, exceeding GBCA requirements for commercial fitouts.



**UV Resistance**  
UV Tested to ASTM D4459.

**NAV DESIGNER SURFACES™**

Navurban™



Silken™




Elements™




\*Navurban Diamond™ offers an extra layer surface protection.  
Printed and online colours should be used as a guide only. Please request a sample to confirm your selection.

## BOARD & BATTEN

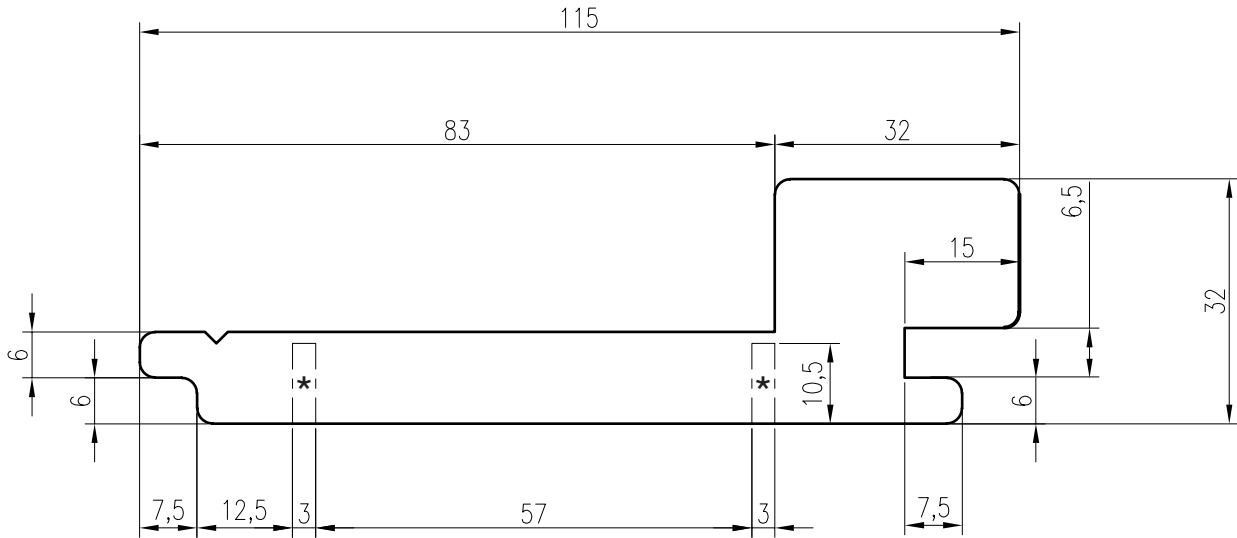


\*3mm relief cut for curved substrates


Mitre Corner Detail



Rebated Corner Detail



Concave / Convex Radius

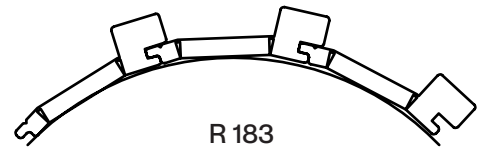

### Mating Detail

**Batten**

Batten to run the opposite direction to MODULO

**8G Countersunk Screw**

**Polyurethane Adhesive**

