

Groove 100

Groove 100 offers a flat tongue and groove panel profile for a subtle timber wall effect with a slight gap, like vertical joint panelling.



Modulo® MR Groove 100 shown in NAVURBAN™ Toorak

How to Specify

Product	Screenwood Modulo® MR
Application	Internal use only
Substrate	Moisture resistant MDF
Fire	Group 3
Profile	Groove 100
Length	Available lengths: 2.7m, 3.6m, 5.4m
Finish	Select finish (e.g. NAVURBAN™ Toorak)

Certifications

Global GreenTag™ certified

Global GreenTag™ certified
GreenTag Level B and GreenTag
PHD Platinum HEALTH™.

Fire certified

Group 3 fire-rated, tested to AS5637.1.
Group 2 fire-rated option available in
this profile.

PEFC™ Fibreboard

From environmentally certified
Australian mills.

Resistant to wear

NAVURBAN™ tested for abrasion
resistance to AS 1580.

Light Reflective Value

NAVURBAN™ tested for exposure in
indoor applications to AS/NZS 1428.1.

Low VOC

Exceeds GBCA requirements for
commercial fitouts. Tested for organic
emissions to ASTM D5116-2017.

UV resistant

NAVURBAN™ tested for exposure in
indoor applications to ASTM D4459.


Test results are available on request.



Groove 100

Profile detail


13.1kg/m²

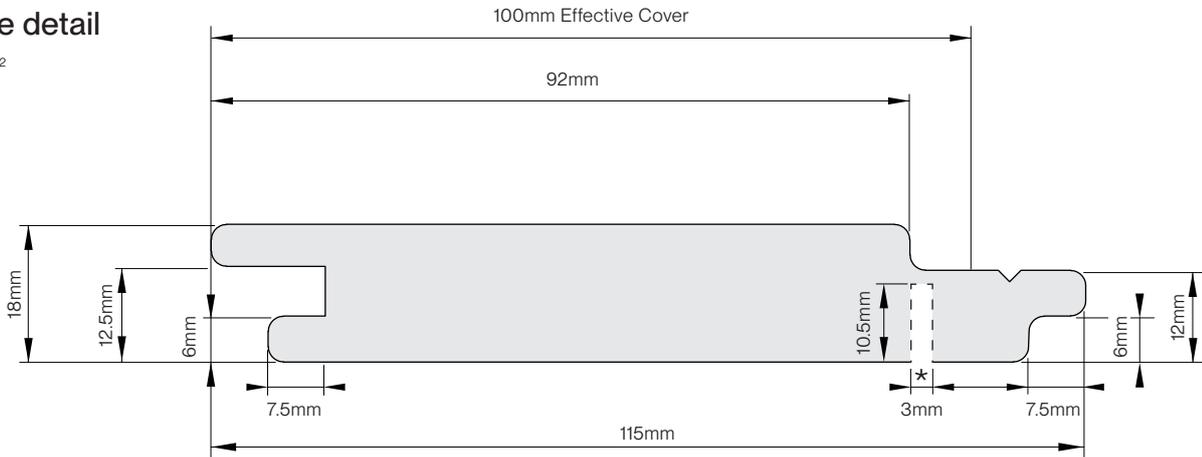

★ Relief cut for curving

Concave curve

400mm Curve Radius




Convex curve

400mm Curve Radius



Concealed screw installation of Modulo® MR

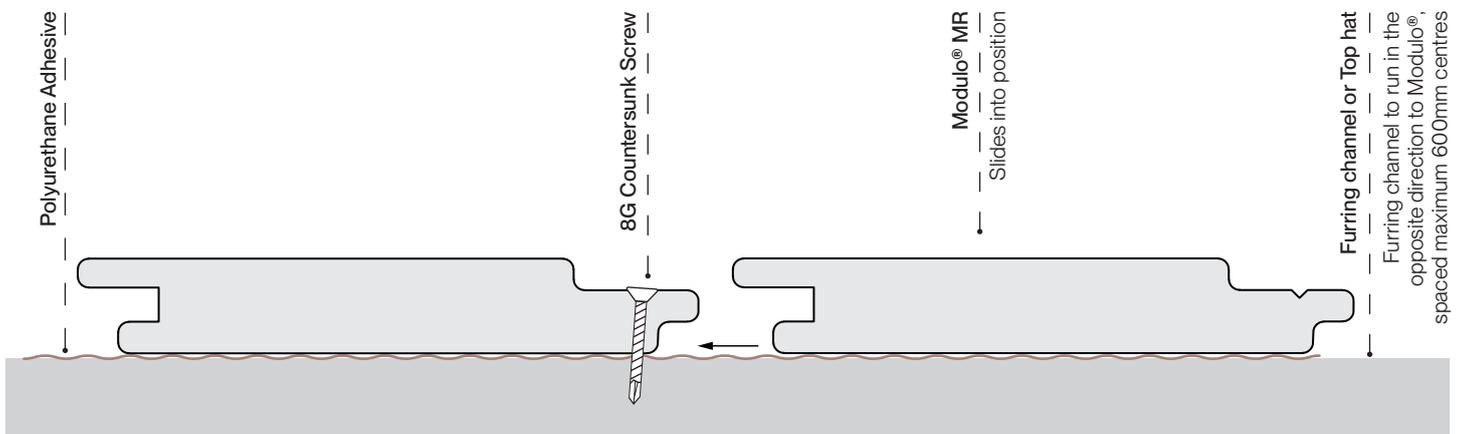

Drawings not to scale.

Groove 100




Visit screenwood.com.au/finishes




Visit screenwood.com.au/resources

Mitre Corner Detail



Rebated Corner Detail



Ultra-realistic Finishes

Modulo® is profile wrapped in premium NAVURBAN™ non-PVC olefin decorative film with seamless finish matching across Screenwood and NAVURBAN™ products. Low VOC, UV and abrasion resistant, no ongoing maintenance and a large scale pattern to avoid pattern repeat.

For the latest finishes, please visit screenwood.com.au/finishes.

Features

- For interior walls, ceilings and curves of up to 400mm radius
- Group 3 fire rated, Golbal GreenTag™ and PEFC certified
- Group 2 fire rated option available in this profile
- Prefinished in olefin film for an ultra-realistic finish
- Low VOC, UV and abrasion resistant
- Simple to install and no ongoing maintenance
- Easy to order with a fast manufacturing lead time
- Arrives in recyclable packaging
- Designed and made in Australia by Screenwood



Need to know more?

We're here to help.

hello@screenwood.com.au

+61 2 9521 7200

screenwood.com.au