PROFILE SPECIFICATION

Modulo® MR

Arc

Arc brings a soft curve to hard edges and is suitable for commercial grade interiors. Modulo® MR Arc is outstanding for walls, ceilings and curves achieving a radius of 175mm.



Modulo® MR Arc shown in NAVURBAN™ Byron Blackbutt

How to Specify

Product	Screenwood Modulo® MR
Application	Internal use only
Substrate	Moisture resistant MDF
Fire	Group 3
Profile	Arc
Length	Available lengths: 2.7m, 3.6m, 5.4m
Finish	Select finish (e.g. NAVURBAN™ Byron Blackbutt)

Certifications

Global GreenTag™ certified

Global GreenTag™ certified to GreenRate Level B.

Fire certified

Group 3 fire-rated, tested to AS5637.1.

PEFC Fibreboard

From environmentally certified Australian mills.

Resistant to wear

NAVURBAN™ tested for abrasion resistance to AS 1580.

Light Reflective Value

NAVURBAN™ tested for exposure in indoor applications to AS/NZS 1428.1.

Low VOC

Exceeds GBCA requirements for commercial fitouts. Tested for organic emissions to ASTM D5116-2017.

UV resistant

NAVURBAN™ tested for exposure in indoor applications to ASTM D4459.

Test results are available on request.

PEFC/21-31-202

Version 3

SCREEN WOOD

432 The Boulevarde
Kirrawee, NSW 2232

+61 2 9521 7200
hello@screenwood.com.au
screenwood.com.au

AUSTRALIAN MADE AND OWNED


PROFILE SPECIFICATION

Modulo® MR

Arc

Profile detail


17.3kg/m²

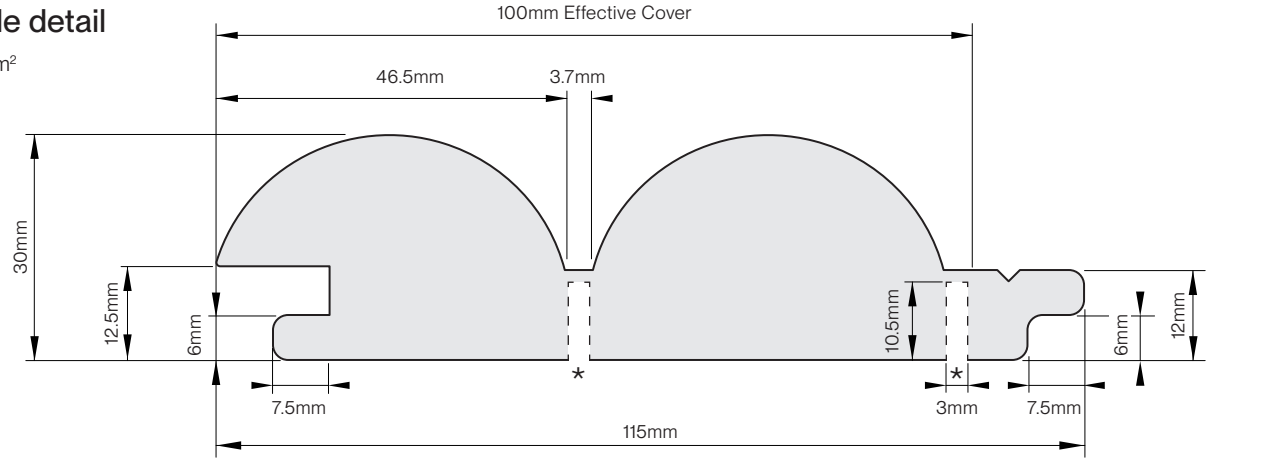

* Relief cut for curving


Concave curve

175mm Curve Radius

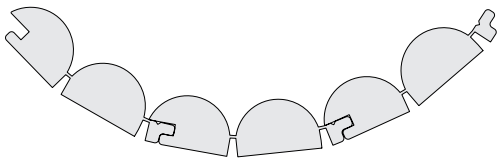


Convex curve

175mm Curve Radius

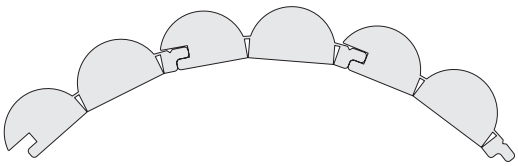

Concealed screw installation of Modulo® MR

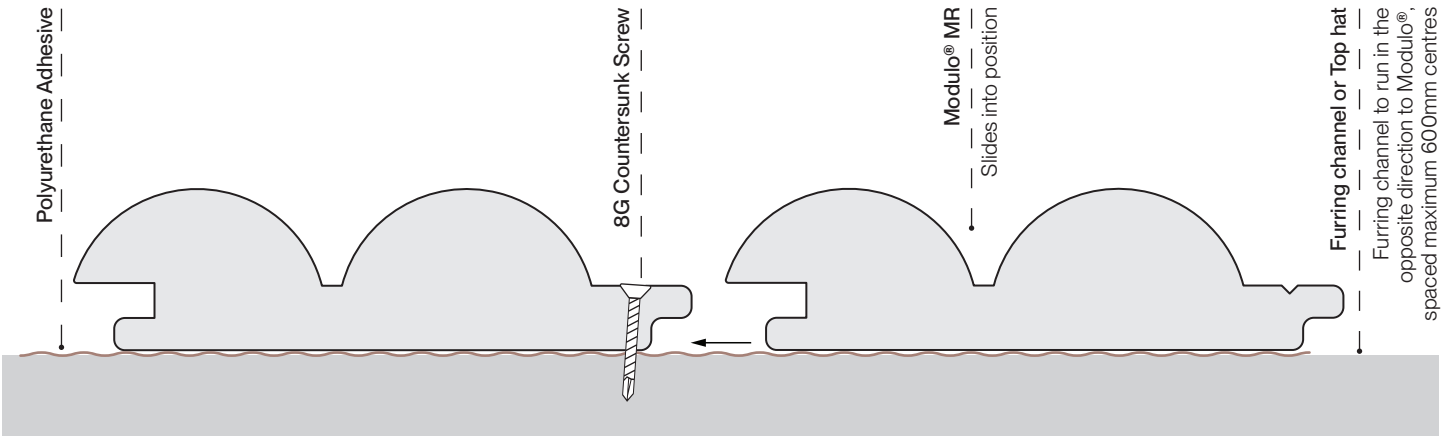

Drawings not to scale.

SCREEN WOOD

432 The Boulevarde
Kirrawee, NSW 2232

+61 2 9521 7200
hello@screenwood.com.au
screenwood.com.au

AUSTRALIAN MADE AND OWNED

PROFILE SPECIFICATION

Modulo® MR

Arc




Visit **screenwood.com.au/finishes**




Visit **screenwood.com.au/resources**

Mitre Corner Detail



Rebated Corner Detail



Ultra-realistic Finishes

Modulo® is profile wrapped in premium NAVURBAN™ non-PVC olefin decorative film with seamless finish matching across Screenwood and NAVURBAN™ products. Low VOC, UV and abrasion resistant, no ongoing maintenance and a large scale pattern to avoid pattern repeat.
For the latest finishes, please visit **screenwood.com.au/finishes**.

Features

- For interior walls, ceilings and curves of up to 175mm radius
- Group 3 fire rated, Golbal GreenTag™ and PEFC certified
- Prefinished in olefin film for an ultra-realistic finish
- Low VOC, UV and abrasion resistant
- Simple to install and no ongoing maintenance
- Easy to order with a fast manufacturing lead time
- Arrives in recyclable packaging
- Designed and made in Australia by Screenwood
- Combine profiles to create a bespoke look

Need to know more? We're here to help.

hello@screenwood.com.au
+61 2 9521 7200
screenwood.com.au

SCREEN WOOD

432 The Boulevarde
Kirrawee, NSW 2232

+61 2 9521 7200
hello@screenwood.com.au
screenwood.com.au

AUSTRALIAN MADE AND OWNED