PROFILE SPECIFICATION

Panels MR

Rectangular 9032 Series

An interior prefinished, preassembled acoustic linear batten system. Suitable for horizontal, vertical and curved applications.



Panels MR Rectangular 9032-3 shown in NAVURBAN™ Birchgrove



9032-2



9032-3

How to Specify

Product	Screenwood Panels MR
Fire	Group 3
Profile	Rectangular 9032-2 /9032-3
Length	Cut to specified size from lengths of 2.7m and 3.6m
Finish	Select finish (e.g. NAVURBAN™ Byron Blackbutt)

Certifications

Global GreenTag™ certified

Global GreenTag™ certified to GreenRate Level B..

Acoustic performance

Achieves NRC of up to 1.0 when installed as recommended.

PEFC Fibreboard

From environmentally certified Australian mills.

Fire certified

Group 3 fire-rated, tested to AS5637.1.

Light Reflective Value

NAVURBAN™ tested for exposure in indoor applications to AS/NZS 1428.1.

Low VOC

Exceeds GBCA requirements for commercial fitouts. Tested for organic emissions to ASTM D5116-2017.

UV resistant

NAVURBAN™ tested for exposure in indoor applications to ASTM D4459.

Resistant to wear

NAVURBAN™ tested for abrasion resistance to AS 1580.

PEFC/21-31-202

Test results are available on request.

Version 2

SCREEN WOOD

432 The Boulevarde
Kirrawee, NSW 2232

+61 2 9521 7200
hello@screenwood.com.au
screenwood.com.au

AUSTRALIAN MADE AND OWNED


PROFILE SPECIFICATION

Panels MR

Rectangular 9032 Series

Rectangular 9032-2

Blade spacing	116mm
Weight	13.9kg/m²

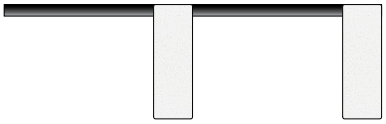


Rectangular 9032-3


Blade spacing	66.7mm
Weight	20.5kg/m²



Back view

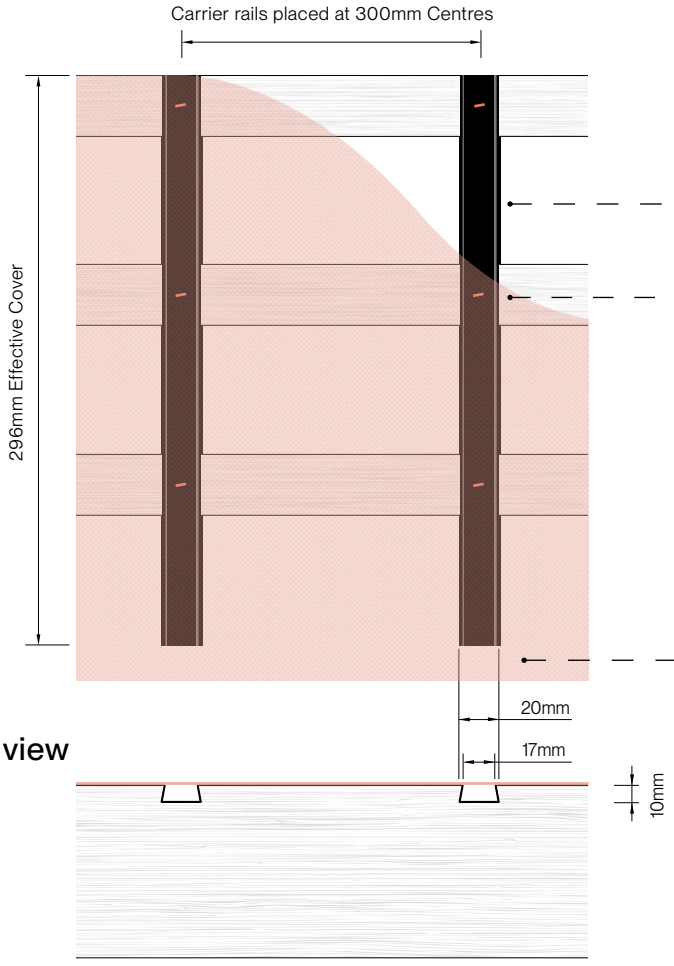

End view

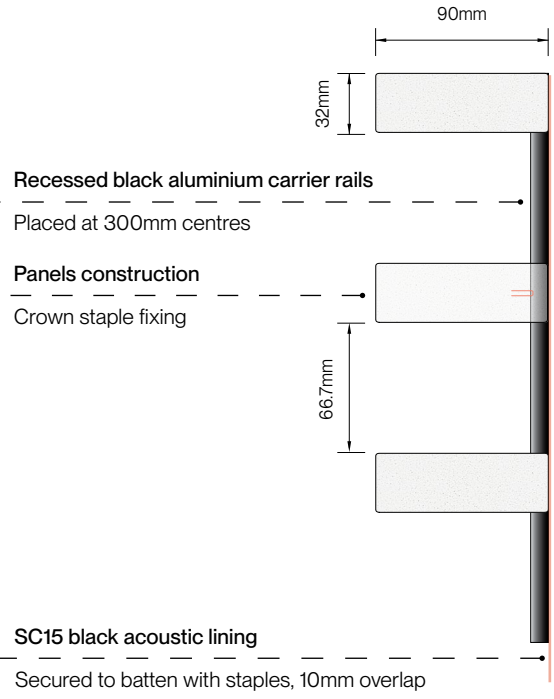

Recessed black aluminium carrier rails
Placed at 300mm centres

Panels construction
Crown staple fixing

SC15 black acoustic lining
Secured to batten with staples, 10mm overlap

Side view

See Panels Installation Guide for more information.
https://screenwood.com.au/resources/

Drawings not to scale.

SCREEN WOOD

432 The Boulevarde
Kirrawee, NSW 2232

+61 2 9521 7200
hello@screenwood.com.au
screenwood.com.au

AUSTRALIAN MADE AND OWNED