PROFILE SPECIFICATION

Panels Solid Timber

6030 Series

This prefinished and preassembled acoustic Panels system is meticulously engineered to empower visionary interior design and reduce reverberation in noise-sensitive environments.



Panels Solid Timber 6030-5 shown in Hemlock, Clear



6030-3



6030-4



6030-5

How to Specify

Product	Screenwood Panels Solid Timber
Substrate	Hemlock, Blackbutt, Western red cedar, Spotted gum
Fire	Group 3
Profile	6030-3 /6030-4 /6030-5
Length	Cut to specified size from lengths 0.9m - 3.6m
Finish	Select finish (e.g. Clear)

Certifications

Global GreenTag™ certified

Global GreenTag™ certified to GreenRate Level B.

Acoustic performance

Achieves NRC of up to 1.0 when installed as recommended.

PEFC Solid Timber

From environmentally certified Australian mills.

Fire certified

Group 3 fire-rated, tested to AS5637.1.

Low VOC

Exceeds GBCA requirements for commercial fitouts. Tested for organic emissions to ASTM D5116-2017.

Test results are available on request.

PEFC/21-31-202

Version 2

SCREEN WOOD

432 The Boulevarde
Kirrawee, NSW 2232

+61 2 9521 7200
hello@screenwood.com.au
screenwood.com.au

AUSTRALIAN MADE AND OWNED

PROFILE SPECIFICATION

Panels Solid Timber

6030 Series

Standard set-outs


6030-3	**Blade spacing**	70.7mm			
	Weight	Hemlock	9.2kg/m²	Western red cedar	6.6kg/m²
		Blackbutt	16.1kg/m²	Spotted gum	17.6kg/m²
6030-4	**Blade spacing**	46mm			
	Weight	Hemlock	12.1kg/m²	Western red cedar	8.6kg/m²
		Blackbutt	21.2kg/m²	Spotted gum	23.3kg/m²
6030-5	**Blade spacing**	31.2mm			
	Weight	Hemlock	15kg/m²	Western red cedar	10.6kg/m²
		Blackbutt	26.4kg/m²	Spotted gum	29kg/m²








Back view

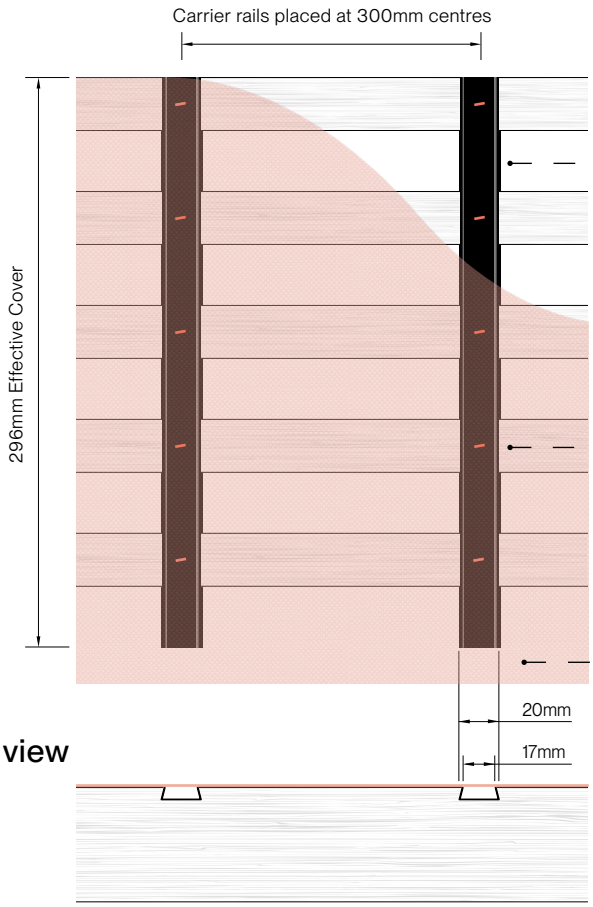

End view

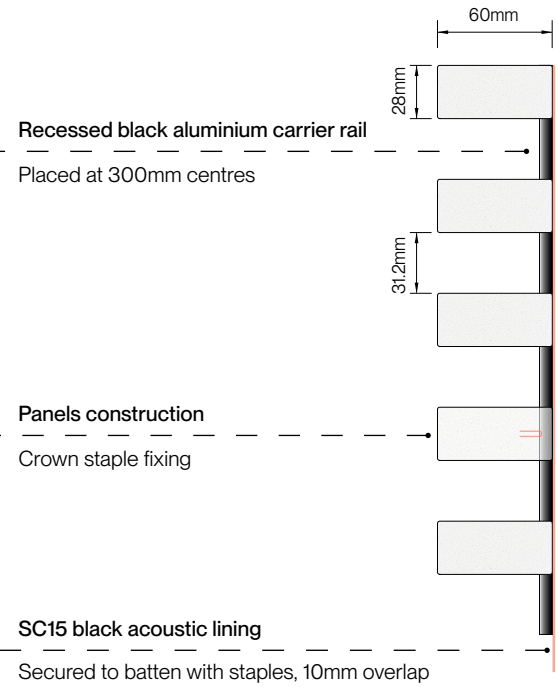

Side view

See Panels Installation Guide for more information.
https://screenwood.com.au/resources/

Drawings not to scale.

SCREEN WOOD

432 The Boulevarde
Kirrawee, NSW 2232

+61 2 9521 7200
hello@screenwood.com.au
screenwood.com.au

AUSTRALIAN MADE AND OWNED