

Fluted 2550

Fluted 2550 prefinished, loose decorative battens enable you to explore dynamic architectural wall shapes, ceilings, custom joinery, and seamless finishing.



Stix® MR Fluted 2550 shown in NAVURBAN Diamond™ Vanilla Bean

How to Specify

Product	Screenwood Stix® MR
Fire	Group 3
Profile	Fluted 2550
Length	Available lengths: 2.7m, 3.6m, 5.4m
Finish	Select finish (e.g. NAVURBAN™ Byron Blackbutt)

Certifications

Global GreenTag™ certified

Global GreenTag™ certified GreenTag Level B and GreenTag PHD Platinum HEALTH™.

Fire certified

Group 3 fire-rated, tested to AS5637.1.

PEFC™ Fibreboard

From environmentally certified Australian mills.

Resistant to wear

NAVURBAN™ tested for abrasion resistance to AS 1580.

Light Reflective Value

NAVURBAN™ tested for exposure in indoor applications to AS/NZS 1428.1.

Low VOC

Exceeds GBCA requirements for commercial fitouts. Tested for organic emissions to ASTM D5116-2017.

UV resistant

NAVURBAN™ tested for exposure in indoor applications to ASTM D4459.


Test results are available on request.



Fluted 2550

Profile detail

0.88kg/lm

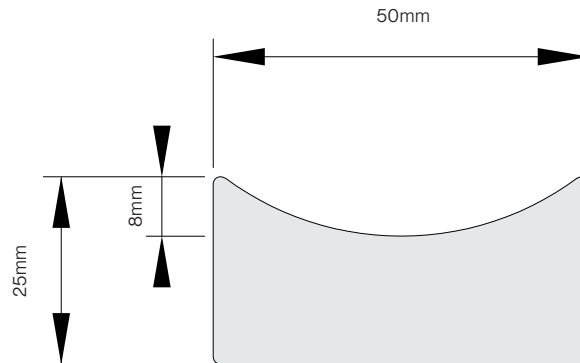

Ultra-realistic Finishes

Stix® is profile wrapped in premium NAVURBAN™ non-PVC olefin decorative film with seamless finish matching across Screenwood and NAVURBAN™ products. Low VOC, UV and abrasion resistant, no ongoing maintenance, and a large scale pattern to avoid pattern repeat.

For the latest finishes, please visit screenwood.com.au/finishes.

Features

- Complements Modulo®, Panels and Soundlina®
- Prefinished in olefin film for an ultra-realistic finish
- Low VOC, UV and abrasion resistant
- Simple to install and no ongoing maintenance
- Easy to order with a fast manufacturing lead time
- Arrives in recyclable packaging
- Designed and made in Australia by Screenwood



Need to know more?

We're here to help.

hello@screenwood.com.au

+61 2 9521 7200

screenwood.com.au

Drawings not to scale.