


# Dome

This sculpted prefinished tongue and groove profile adds soft curves to hard edges in Group 1 fire-rated, noise-sensitive interiors.

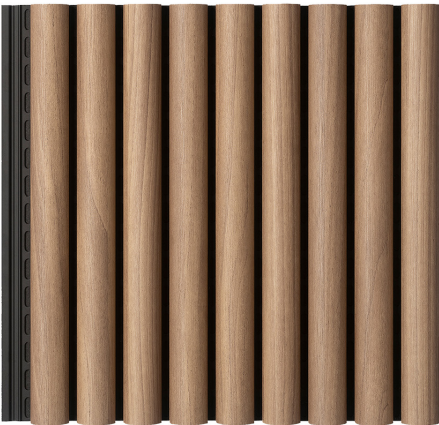

Modulo® Acoustic Dome shown in NAVURBAN™ Tablelands

## How to Specify

Product	Screenwood Modulo® Acoustic
Application	Internal use only
Substrate	Aluminium
Fire	Group 1
NRC	0.75
Profile	Dome
Length	Available lengths: 2.7m, 3.6m, 5.4m
Finish	Select finish (e.g. NAVURBAN™ Tablelands)

## Certifications

### Acoustic performance

Achieves NRC 0.75 when installed as recommended.

### Fire certified

Group 1 fire-rated, tested to AS5637.1 and AS/NZS 1530.3:1999.

### UV resistant

NAVURBAN™ tested for exposure in indoor applications to ASTM D4459.

### Resistant to wear

NAVURBAN™ tested for abrasion resistance to AS 1580.

### Light Reflectance Value

NAVURBAN™ tested for exposure in indoor applications to AS/NZS 1428.1.

### Low VOC

Exceeds GBCA requirements for commercial fitouts. Tested for organic emissions to ASTM D5116-2017.

### World-class sustainability


All our products are Global GreenTag™ certified. As this one has just launched, certification for Modulo® Acoustic is underway to align with our ethical and sustainability goals.

Test results are available on request.

# Dome

## Profile detail

10.5kg/m<sup>2</sup>

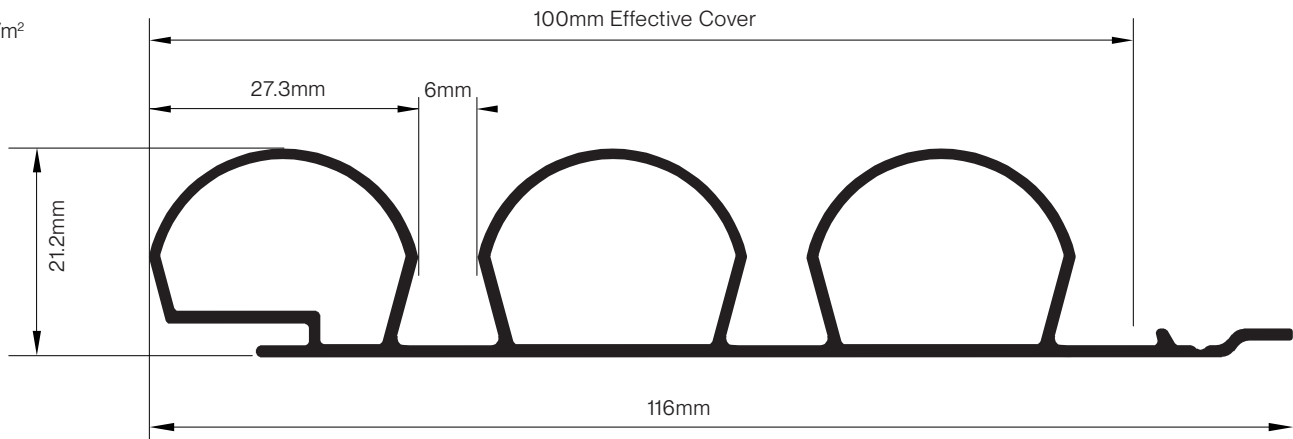


## Concave curve

300mm Curve Radius




## Convex curve

300mm Curve Radius

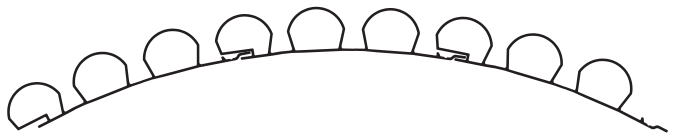

## Concealed screw installation of Modulo® Acoustic

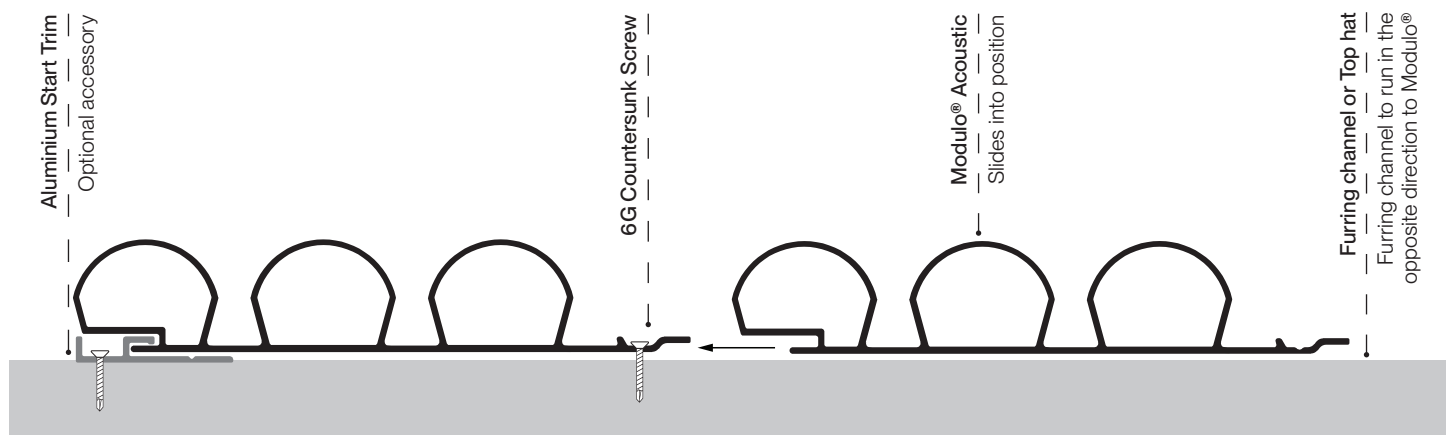

Drawings not to scale.

# Dome

---



Visit [screenwood.com.au/finishes](https://screenwood.com.au/finishes)

## Accessories

Installation is simple with Screenwood start trim and external corner trim available to fit Modulo® Acoustic providing a professional finish. No costly componentry is required and can be combined with aluminium trim supplied by others.

## Ultra-realistic Finishes

Modulo® is profile wrapped in premium NAVURBAN™ non-PVC olefin decorative film with seamless finish matching across Screenwood and NAVURBAN™ products. Low VOC, UV and abrasion resistant, no ongoing maintenance and a scale pattern to avoid plank pattern repeat. For the latest finishes, please visit [screenwood.com.au/finishes](https://screenwood.com.au/finishes).



Visit [screenwood.com.au/resources](https://screenwood.com.au/resources)

## Features

- For interior walls, ceilings and curves of up to 300mm radius
- High acoustic performance.
- Group 1 fire rated & Golbal GreenTag™ certification pending
- Prefinished in olefin film for an ultra-realistic finish
- Low VOC, UV and abrasion resistant
- Simple to install and no ongoing maintenance
- Easy to order with a fast manufacturing lead time.
- Made and designed in Australian by Screenwood



**Need to know more?  
We're here to help.**

[hello@screenwood.com.au](mailto:hello@screenwood.com.au)  
+61 2 9521 7200  
[screenwood.com.au](https://screenwood.com.au)