

Batten

Batten is our wood panelling lookalike profile, but it's far easier, faster and more cost effective to install than traditional panelling. Achieving a tight 100mm curve radius, Batten is outstanding for sculptural design.



Modulo® MR Batten shown in
NAVURBAN Diamond™ White Mountain Oak

How to Specify

| | |
|--------------------|--|
| Product | Screenwood Modulo® MR |
| Application | Internal use only |
| Substrate | Moisture resistant MDF |
| Fire | Group 3 |
| Profile | Batten |
| Length | Available lengths: 2.7m, 3.6m, 5.4m |
| Finish | Select finish (e.g. NAVURBAN™ Byron Blackbutt) |

Certifications

Global GreenTag™ certified

Global GreenTag™ certified
GreenTag Level B and GreenTag
PHD Platinum HEALTH™.

Fire certified

Group 3 fire-rated, tested to AS5637.1.

PEFC™ Fibreboard

From environmentally certified
Australian mills.

Resistant to wear

NAVURBAN™ tested for abrasion
resistance to AS 1580.

Light Reflective Value

NAVURBAN™ tested for exposure in
indoor applications to AS/NZS 1428.1.

Low VOC

Exceeds GBCA requirements for
commercial fitouts. Tested for organic
emissions to ASTM D5116-2017.

UV resistant

NAVURBAN™ tested for exposure in
indoor applications to ASTM D4459.


Test results are available on request.



Batten


Profile detail

18.1kg/m²

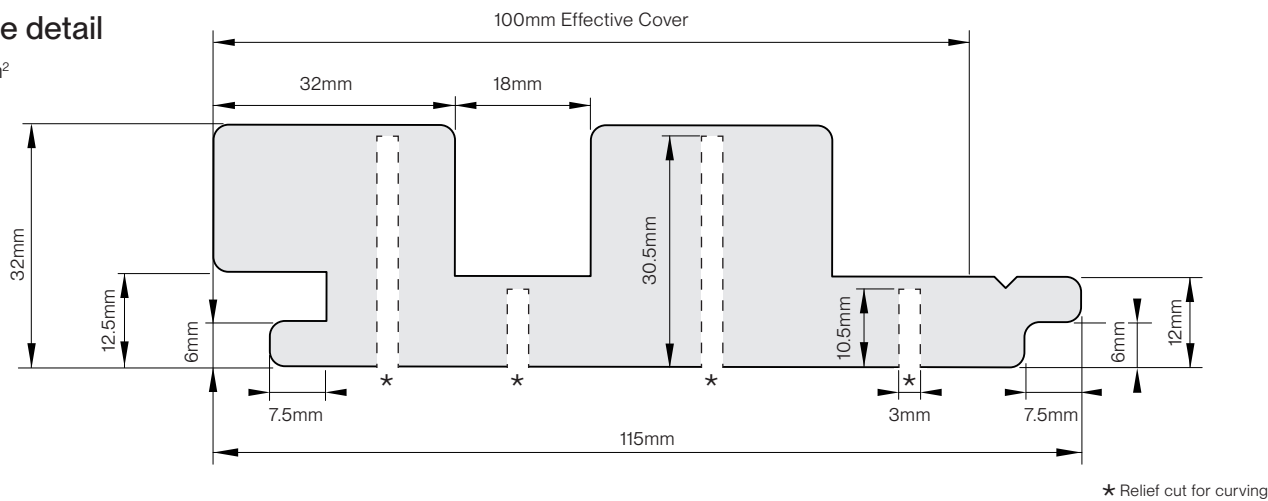


Concave curve

100mm Curve Radius

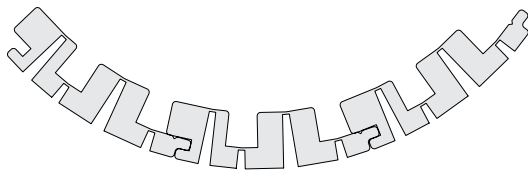


Convex curve

100mm Curve Radius

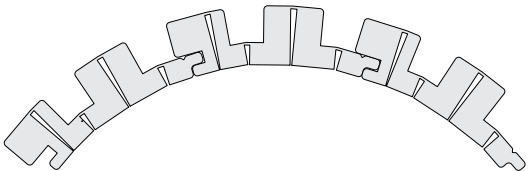

Concealed screw installation of Modulo® MR

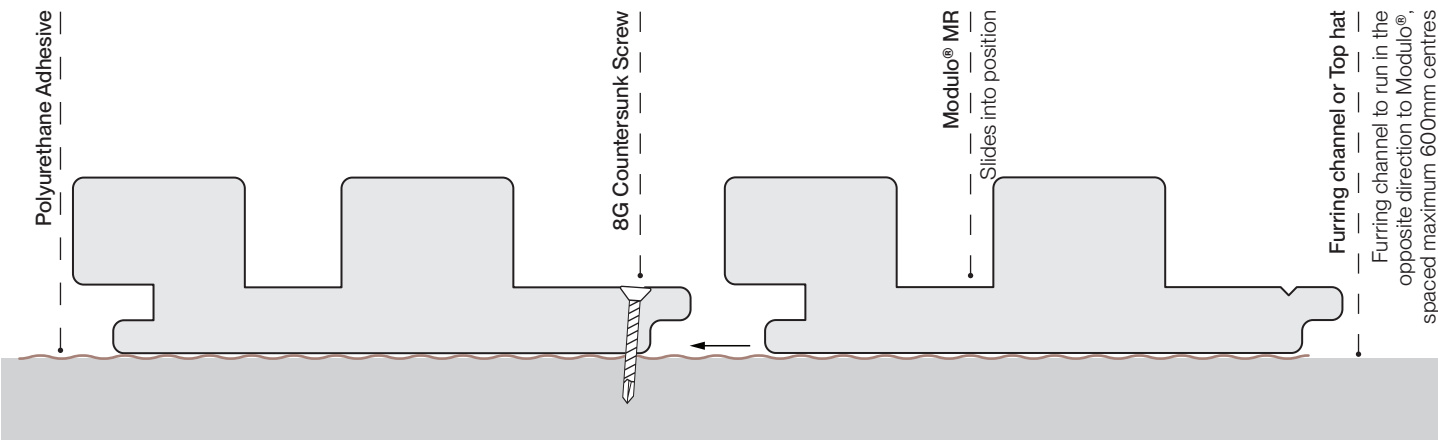

Drawings not to scale.

Batten




Visit screenwood.com.au/finishes




Visit screenwood.com.au/resources

Mitre Corner Detail



Rebated Corner Detail



Ultra-realistic Finishes

Modulo® is profile wrapped in premium NAVURBAN™ non-PVC olefin decorative film with seamless finish matching across Screenwood and NAVURBAN™ products. Low VOC, UV and abrasion resistant, no ongoing maintenance and a large scale pattern to avoid pattern repeat. For the latest finishes, please visit screenwood.com.au/finishes.

Features

- For interior walls, ceilings and curves of up to 100mm radius
- Group 3 fire rated, Golbal GreenTag™ and PEFC certified
- Prefinished in olefin film for an ultra-realistic finish
- Low VOC, UV and abrasion resistant
- Simple to install and no ongoing maintenance
- Easy to order with a fast manufacturing lead time
- Arrives in recyclable packaging
- Designed and made in Australia by Screenwood
- Combine profiles to create a bespoke look



**Need to know more?
We're here to help.**

hello@screenwood.com.au
+61 2 9521 7200
screenwood.com.au