PROFILE SPECIFICATION

Modulo[®] MR



Groove 100

Groove 100 offers a flat tongue and groove panel profile for a subtle timber wall effect with a slight gap, like vertical joint panelling.



Modulo[®] MR Groove 100 shown in NAVURBAN™ Toorak

How to Specify

Product	Screenwood Modulo® MR
Application	Internal use only
Substrate	Moisture resistant MDF
Fire	Group 3
Profile	Groove 100
Length	Available lengths: 2.7m, 3.6m, 5.4m
Finish	Select finish (e.g. NAVURBAN™ Toorak)

Certifications

Global GreenTag[™] certified

Global GreenTag[™] certified GreenTag Level B and GreenTag PHD Platinum HEALTH[™].

PEFC[™] Fibreboard

From environmentally certified Australian mills.

Light Reflective Value

NAVURBAN[™] tested for exposure in indoor applications to AS/NZS 1428.1.

UV resistant

NAVURBAN[™] tested for exposure in indoor applications to ASTM D4459.

Test results are available on request.

Fire certified

Group 3 fire-rated, tested to AS5637.1. Group 2 fire-rated option available in this profile.

Resistant to wear

NAVURBAN[™] tested for abrasion resistance to AS 1580.

Low VOC

Exceeds GBCA requirements for commercial fitouts. Tested for organic emissions to ASTM D5116-2017.








Version 1

Modulo[®] MR



Groove 100

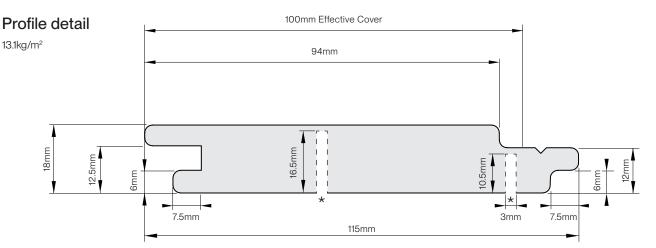

★ Relief cut for curving


Concave curve

Convex curve


400mm Curve Radius







Concealed screw installation of Modulo® MR

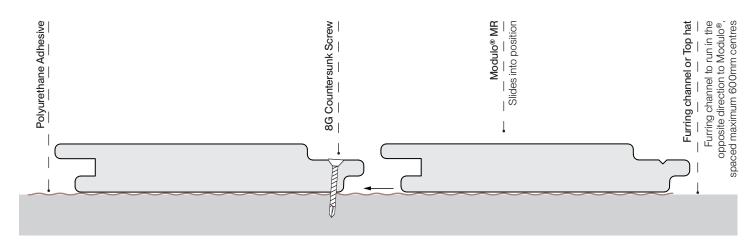

Drawings not to scale.





PROFILE SPECIFICATION

Modulo[®] MR



Groove 100




Visit screenwood.com.au/finishes




Visit screenwood.com.au/resources

Mitre Corner Detail



Rebated Corner Detail



Ultra-realistic Finishes

Modulo[®] is profile wrapped in premium NAVURBAN[™] non-PVC olefin decorative film with seamless finish matching across Screenwood and NAVURBAN[™] products. Low VOC, UV and abrasion resistant, no ongoing maintenance and a large scale pattern to avoid pattern repeat. For the latest finishes, please visit **screenwood.com.au/finishes**.

Features

- For interior walls, ceilings and curves of up to 400mm radius
- Group 3 fire rated, Golbal GreenTag™ and PEFC certified
- Group 2 fire rated option available in this profile
- · Prefinished in olefin film for an ultra-realistic finish
- Low VOC, UV and abrasion resistant
- Simple to install and no ongoing maintenance
- Easy to order with a fast manufacturing lead time
- Arrives in recyclable packaging
- Designed and made in Australia by Screenwood



Need to know more? We're here to help. hello@screenwood.com.au +61 2 9521 7200

+61 2 9521 7200 screenwood.com.au





432 The Boulevarde Kirrawee NSW 2229