Modulo® MR



Groove 50

Groove 50's flat and subtle panelling is smaller than vertical joint panelling for a refined aesthetic. It's an excellent choice for sculptural tongue and groove panel designs, achieving a 150mm curve radius.



Modulo® MR Groove 50 shown in NAVURBAN™ The Oaks

How to Specify

Product Screenwood Modulo® MR

Application Internal use only

Substrate Moisture resistant MDF

Fire Group 3 **Profile** Groove 50

Available lengths: 2.7m, 3.6m, 5.4m Length

Finish Select finish (e.g. NAVURBAN™ The Oaks)

Certifications

Global GreenTag™ certified

Global GreenTag™ certified GreenTag Level B and GreenTag PHD Platinum HEALTH™.

PEFC™ Fibreboard

From environmentally certified Australian mills.

Light Reflective Value

NAVURBAN™ tested for exposure in indoor applications to AS/NZS 1428.1.

UV resistant

NAVURBAN™ tested for exposure in indoor applications to ASTM D4459.

Test results are available on request.

432 The Boulevarde

Kirrawee NSW 2229

Fire certified

Group 3 fire-rated, tested to AS5637.1.

Resistant to wear

NAVURBAN™ tested for abrasion resistance to AS 1580.

Low VOC

Exceeds GBCA requirements for commercial fitouts. Tested for organic emissions to ASTM D5116-2017.








Version 1








Modulo® MR




Groove 50

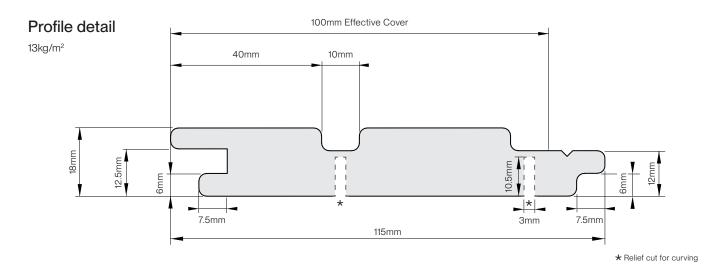


Concave curve

150mm Curve Radius




Convex curve

150mm Curve Radius



Concealed screw installation of Modulo® MR

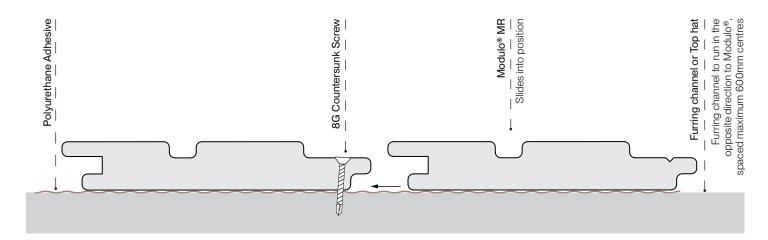

Drawings not to scale.





Modulo® MR



Groove 50




Visit screenwood.com.au/finishes




Visit screenwood.com.au/resources

Mitre Corner Detail



Rebated Corner Detail



Ultra-realistic Finishes

Modulo® is profile wrapped in premium NAVURBAN™ non-PVC olefin decorative film with seamless finish matching across Screenwood and NAVURBAN™ products. Low VOC, UV and abrasion resistant, no ongoing maintenance and a large scale pattern to avoid pattern repeat. For the latest finishes, please visit screenwood.com.au/finishes.

Features

- For interior walls, ceilings and curves of up to 150mm radius
- Group 3 fire rated, Golbal GreenTag™ and PEFC certified
- Prefinished in olefin film for an ultra-realistic finish
- Low VOC, UV and abrasion resistant
- Simple to install and no ongoing maintenance
- Easy to order with a fast manufacturing lead time
- Arrives in recyclable packaging
- Designed and made in Australia by Screenwood
- Combine profiles to create a bespoke look



Need to know more? We're here to help.

hello@screenwood.com.au +61 2 9521 7200 screenwood.com.au



