

# Groove 100

Groove 100 offers a flat tongue and groove panel profile for a subtle timber wall effect with a slight gap, like vertical joint panelling.



Modulo® MR Groove 100 shown in NAVURBAN™ Toorak

## How to Specify

<b>Product</b>	Screenwood Modulo® MR
<b>Application</b>	Internal use only
<b>Substrate</b>	Moisture resistant MDF
<b>Fire</b>	Group 3
<b>Profile</b>	Groove 100
<b>Length</b>	Available lengths: 2.7m, 3.6m, 5.4m
<b>Finish</b>	Select finish (e.g. NAVURBAN™ Toorak)

## Certifications

### Global GreenTag™ certified

Global GreenTag™ certified  
GreenTag Level B and GreenTag  
PHD Platinum HEALTH™.

### PEFC™ Fibreboard

From environmentally certified  
Australian mills.

### Light Reflective Value

NAVURBAN™ tested for exposure in  
indoor applications to AS/NZS 1428.1.

### UV resistant

NAVURBAN™ tested for exposure in  
indoor applications to ASTM D4459.

Test results are available on request.

### Fire certified

Group 3 fire-rated, tested to AS5637.1.  
Group 2 fire-rated option available in  
this profile.

### Resistant to wear

NAVURBAN™ tested for abrasion  
resistance to AS 1580.

### Low VOC


Exceeds GBCA requirements for  
commercial fitouts. Tested for organic  
emissions to ASTM D5116-2017.



# Groove 100

## Profile detail


13.1kg/m<sup>2</sup>

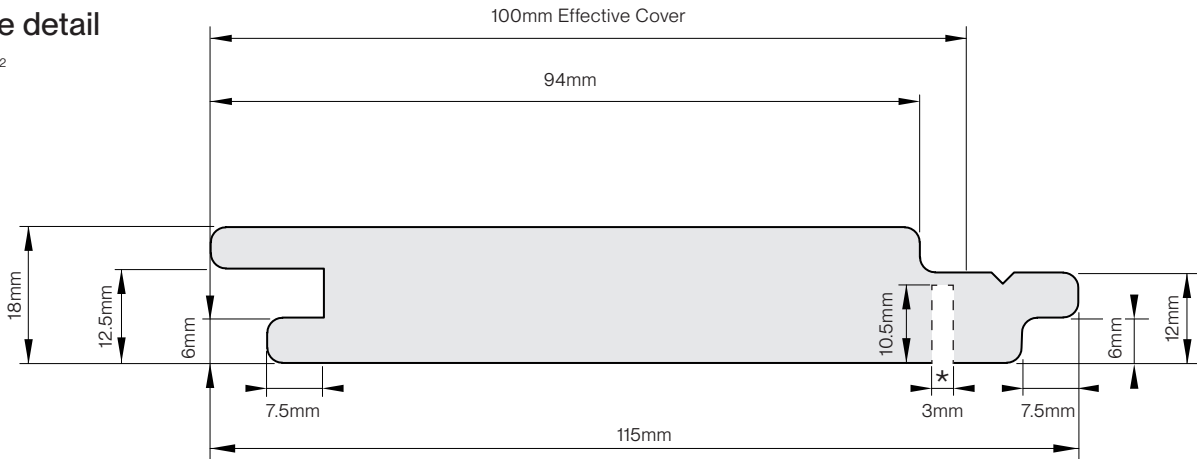

★ Relief cut for curving


## Concave curve

400mm Curve Radius




## Convex curve

400mm Curve Radius



## Concealed screw installation of Modulo® MR

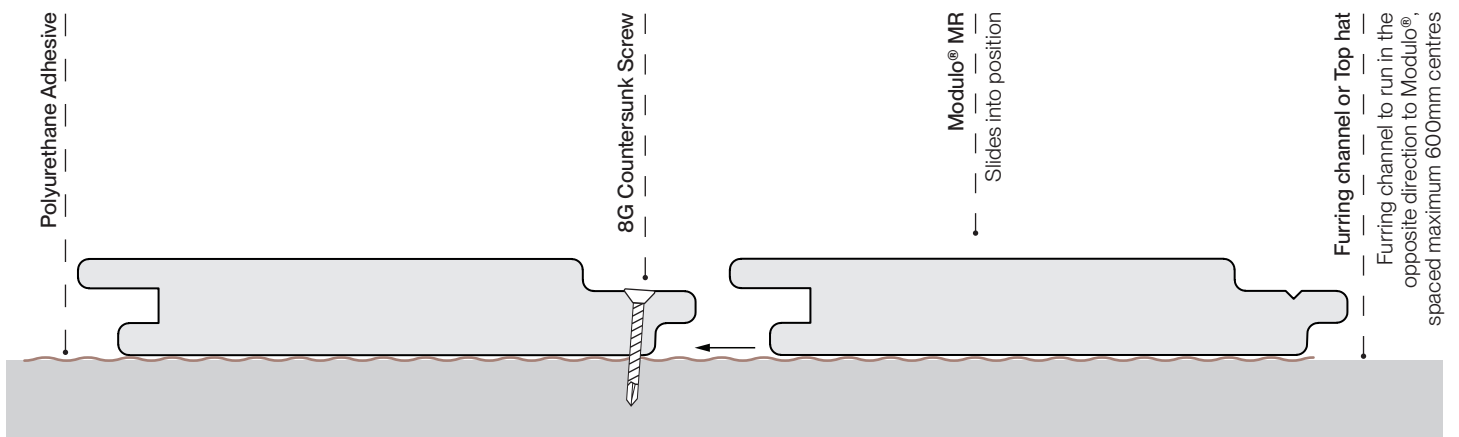


Drawings not to scale.

# Groove 100




Visit [screenwood.com.au/finishes](https://screenwood.com.au/finishes)

Mitre Corner Detail



Rebated Corner Detail



## Ultra-realistic Finishes

Modulo® is profile wrapped in premium NAVURBAN™ non-PVC olefin decorative film with seamless finish matching across Screenwood and NAVURBAN™ products. Low VOC, UV and abrasion resistant, no ongoing maintenance and a large scale pattern to avoid pattern repeat.

For the latest finishes, please visit [screenwood.com.au/finishes](https://screenwood.com.au/finishes).

## Features

- For interior walls, ceilings and curves of up to 400mm radius
- Group 3 fire rated, Golbal GreenTag™ and PEFC certified
- Group 2 fire rated option available in this profile
- Prefinished in olefin film for an ultra-realistic finish
- Low VOC, UV and abrasion resistant
- Simple to install and no ongoing maintenance
- Easy to order with a fast manufacturing lead time
- Arrives in recyclable packaging
- Designed and made in Australia by Screenwood



Visit [screenwood.com.au/resources](https://screenwood.com.au/resources)



Need to know more?

We're here to help.

[hello@screenwood.com.au](mailto:hello@screenwood.com.au)

+61 2 9521 7200

[screenwood.com.au](https://screenwood.com.au)