

Fluted 2550 Series

An interior prefinished, preassembled acoustic linear batten system. Suitable for horizontal, vertical and curved applications.




Panels MR Fluted 2550-5 shown in NAVURBAN Diamond™ Vanilla Bean

How to Specify

Product	Screenwood Panels MR
Fire	Group 3
Profile	Fluted 2550-3 /2550-4 /2550-5
Length	Cut to specified size from lengths of 2.7m and 3.6m
Finish	Select finish (e.g. NAVURBAN™ Byron Blackbutt)

Certifications

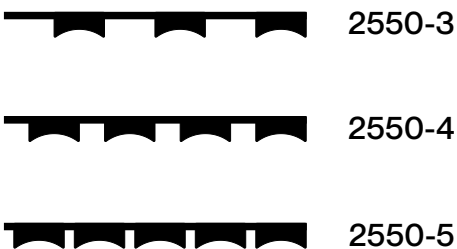

Global GreenTag™ certified

Global GreenTag™ certified
GreenTag Level B and GreenTag
PHD Platinum HEALTH™.

Acoustic performance

Achieves NRC of up to 1.0 when
installed as recommended.

PEFC™ Fibreboard

From environmentally certified Australian
mills.

Fire certified

Group 3 fire-rated, tested to AS5637.1.

Light Reflective Value

NAVURBAN™ tested for exposure in
indoor applications to AS/NZS 1428.1.

Low VOC

Exceeds GBCA requirements for
commercial fitouts. Tested for organic
emissions to ASTM D5116-2017.

UV resistant

NAVURBAN™ tested for exposure in
indoor applications to ASTM D4459.




Resistant to wear

NAVURBAN™ tested for abrasion
resistance to AS 1580.




Fluted 2550 Series

Standard set-outs

Fluted 2550-3	Blade spacing	48.7mm	
	Weight	9.2kg/m ²	
Fluted 2550-4	Blade spacing	24mm	
	Weight	12.1kg/m ²	
Fluted 2550-5	Blade spacing	9.2mm	
	Weight	15kg/m ²	

Back view

End view

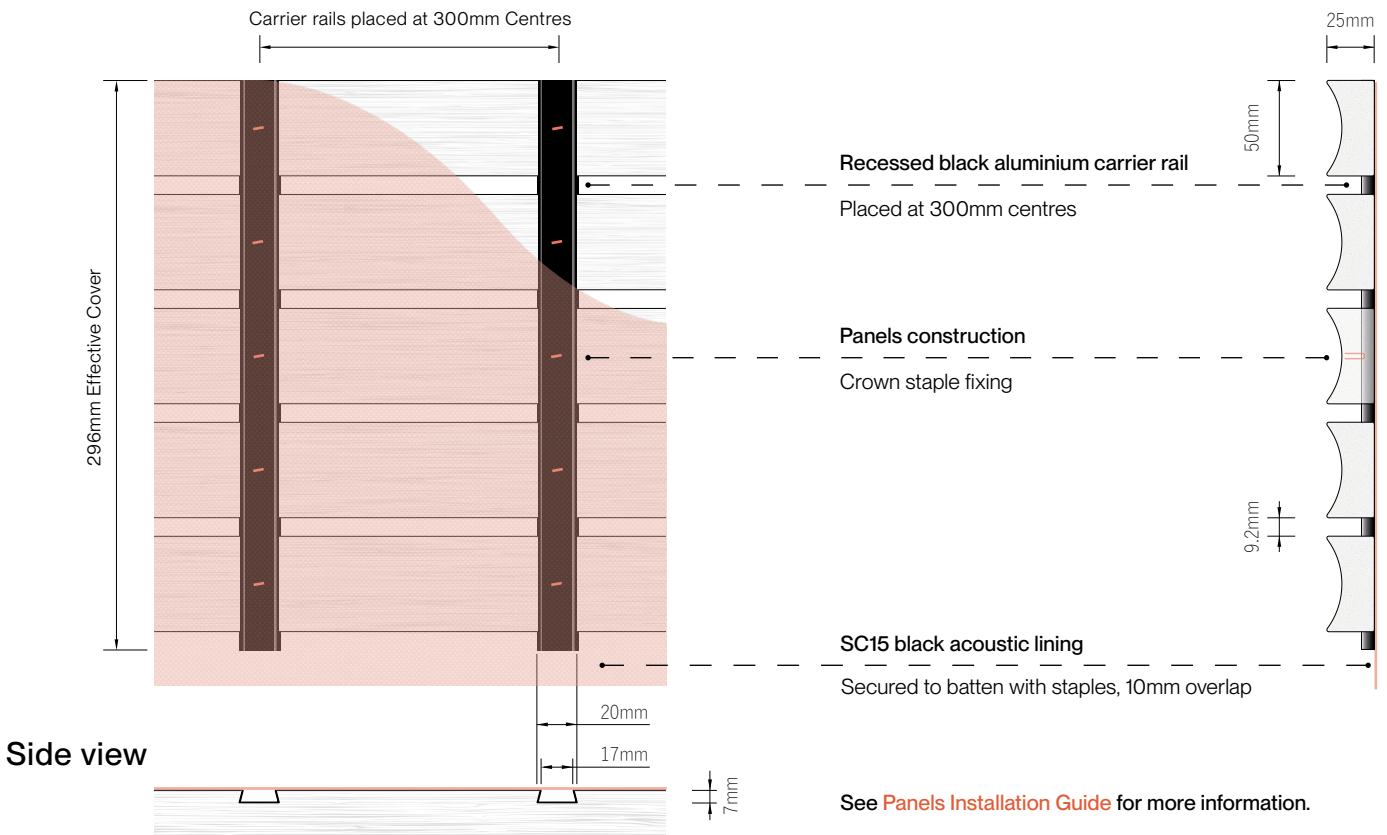

Drawings not to scale.