

# Half-round 3250 Series

An interior prefinished, preassembled acoustic linear batten system. Suitable for horizontal, vertical and curved applications.



Panels MR Half-round 3250 shown in NAVURBAN™ Classic American Oak

## How to Specify

Product	Screenwood Panels MR
Fire	Group 3
Profile	Half-round 3250-3 /3250-4 /3250-5
Length	Cut to specified size from lengths of 2.7m and 3.6m
Finish	Select finish (e.g. NAVURBAN™ Byron Blackbutt)

## Certifications

### Global GreenTag™ certified

Global GreenTag™ certified  
GreenTag Level B and GreenTag  
PHD Platinum HEALTH™.

### PEFC™ Fibreboard

From environmentally certified Australian mills.

### Light Reflective Value

NAVURBAN™ tested for exposure in indoor applications to AS/NZS 1428.1.

### UV resistant

NAVURBAN™ tested for exposure in indoor applications to ASTM D4459.

### Acoustic performance

Achieves NRC of up to 1.0 when installed as recommended.

### Fire certified

Group 3 fire-rated, tested to AS5637.1.

### Low VOC

Exceeds GBCA requirements for commercial fitouts. Tested for organic emissions to ASTM D5116-2017.


### Resistant to wear

NAVURBAN™ tested for abrasion resistance to AS 1580.




# Half-round 3250 Series

## Standard set-outs

Half-round 3250-3	Blade spacing	48.7mm	
	Weight	11kg/m <sup>2</sup>	
Half-round 3250-4	Blade spacing	24mm	
	Weight	14.5kg/m <sup>2</sup>	
Half-round 3250-5	Blade spacing	9.2mm	
	Weight	18kg/m <sup>2</sup>	

## Back view

## End view

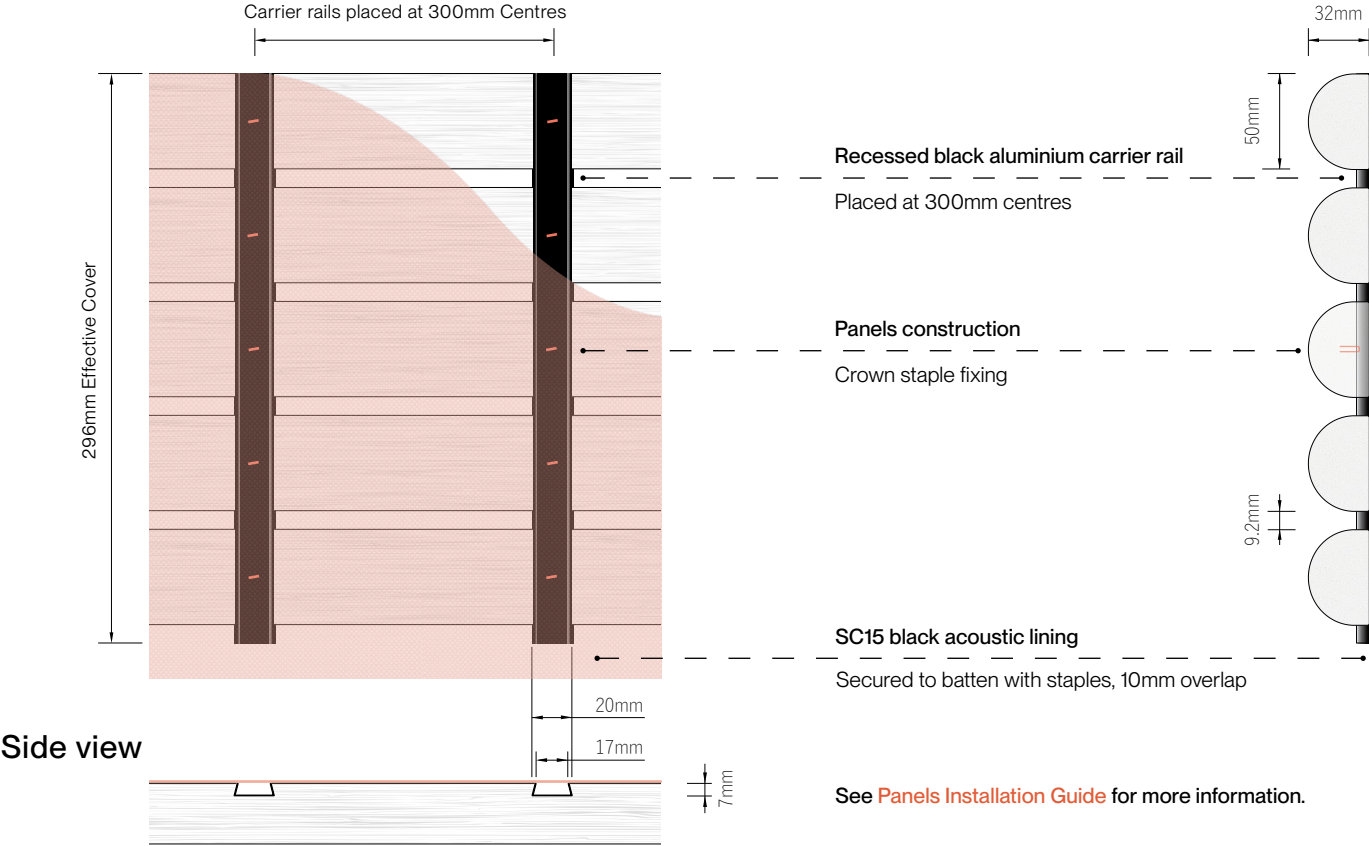

Drawings not to scale.