

Rectangular 5025 Series

An interior prefinished, preassembled acoustic linear batten system. Suitable for horizontal, vertical and curved applications.



Panels MR Rectangular 5025-6 shown in NAVURBAN Diamond™ Box Wood

How to Specify

Product	Screenwood Panels MR
Fire	Group 3
Profile	Rectangular 5025-4 /5025-5 /5025-6
Length	Cut to specified size from lengths of 2.7m and 3.6m
Finish	Select finish (e.g. NAVURBAN™ Byron Blackbutt)

Certifications

Global GreenTag™ certified

Global GreenTag™ certified
GreenTag Level B and GreenTag
PHD Platinum HEALTH™.

PEFC™ Fibreboard

From environmentally certified Australian mills.

Light Reflective Value

NAVURBAN™ tested for exposure in indoor applications to AS/NZS 1428.1.

UV resistant

NAVURBAN™ tested for exposure in indoor applications to ASTM D4459.

Acoustic performance

Achieves NRC of up to 1.0 when installed as recommended.

Fire certified

Group 3 fire-rated, tested to AS5637.1.

Low VOC

Exceeds GBCA requirements for commercial fitouts. Tested for organic emissions to ASTM D5116-2017.

Resistant to wear

NAVURBAN™ tested for abrasion resistance to AS 1580.




Rectangular 5025 Series

Standard set-outs

Rectangular 5025-4	Blade spacing	49mm	
	Weight	12.1kg/m ²	
Rectangular 5025-5	Blade spacing	34.2mm	
	Weight	15kg/m ²	
Rectangular 5025-6	Blade spacing	24.3mm	
	Weight	17.9kg/m ²	

Back view

End view

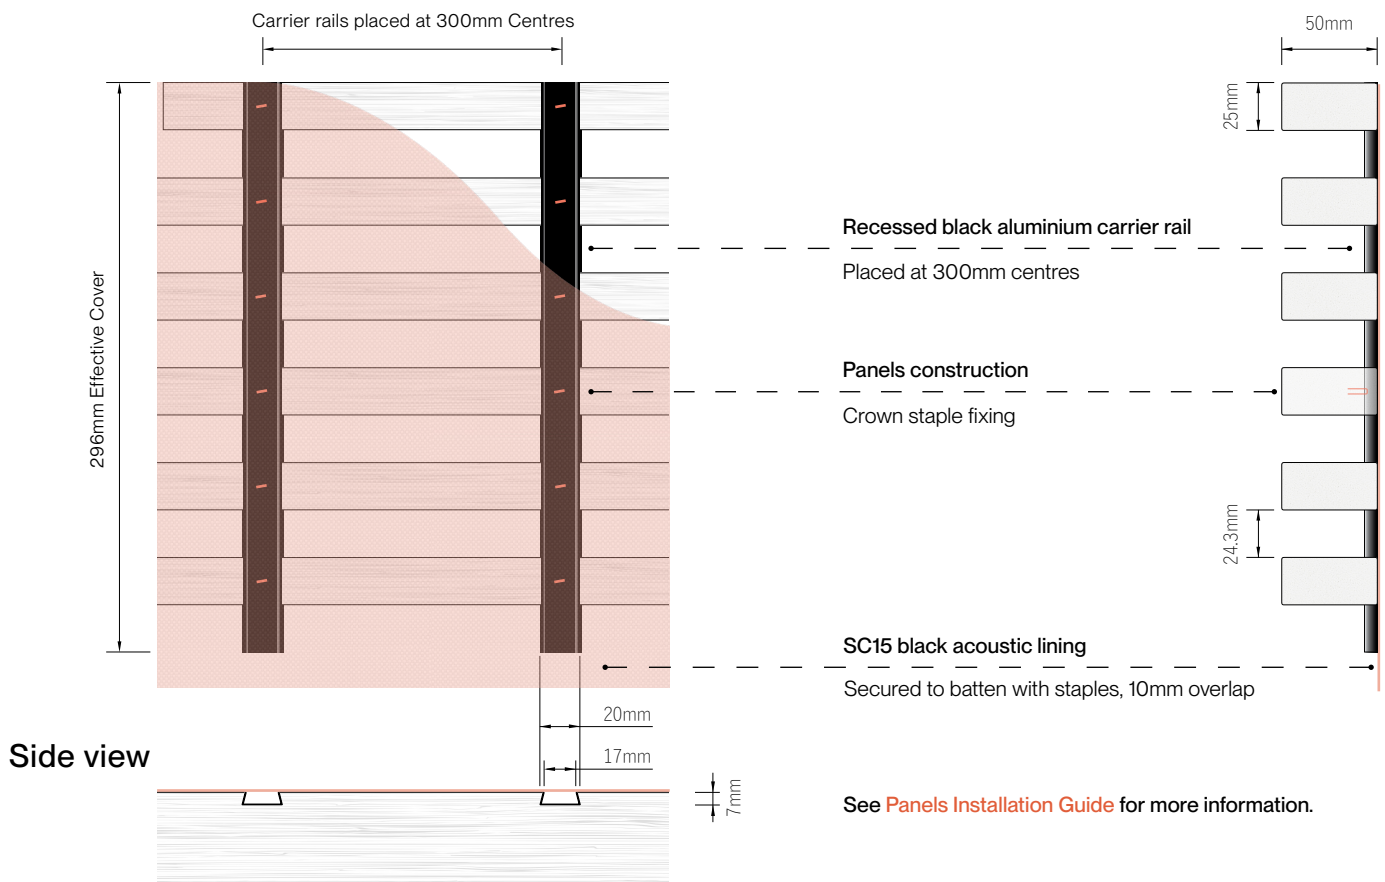

Drawings not to scale.