

Rectangular 9032 Series

An interior prefinished, preassembled acoustic linear batten system. Suitable for horizontal, vertical and curved applications.



Panels MR Rectangular 9032-3 shown in NAVURBAN™ Birchgrove

How to Specify

Product	Screenwood Panels MR
Fire	Group 3
Profile	Rectangular 9032-2 /9032-3
Length	Cut to specified size from lengths of 2.7m and 3.6m
Finish	Select finish (e.g. NAVURBAN™ Byron Blackbutt)

Certifications

Global GreenTag™ certified

Global GreenTag™ certified
GreenTag Level B and GreenTag
PHD Platinum HEALTH™.

PEFC™ Fibreboard

From environmentally certified Australian mills.

Light Reflective Value

NAVURBAN™ tested for exposure in indoor applications to AS/NZS 1428.1.

UV resistant

NAVURBAN™ tested for exposure in indoor applications to ASTM D4459.

Acoustic performance

Achieves NRC of up to 1.0 when installed as recommended.

Fire certified

Group 3 fire-rated, tested to AS5637.1.

Low VOC

Exceeds GBCA requirements for commercial fitouts. Tested for organic emissions to ASTM D5116-2017.


Resistant to wear

NAVURBAN™ tested for abrasion resistance to AS 1580.



Rectangular 9032 Series

Rectangular 9032-2	Blade spacing	116mm
	Weight	13.9kg/m ²

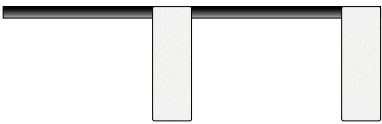


Rectangular 9032-3	Blade spacing	66.7mm
	Weight	20.5kg/m ²



Back view

End view

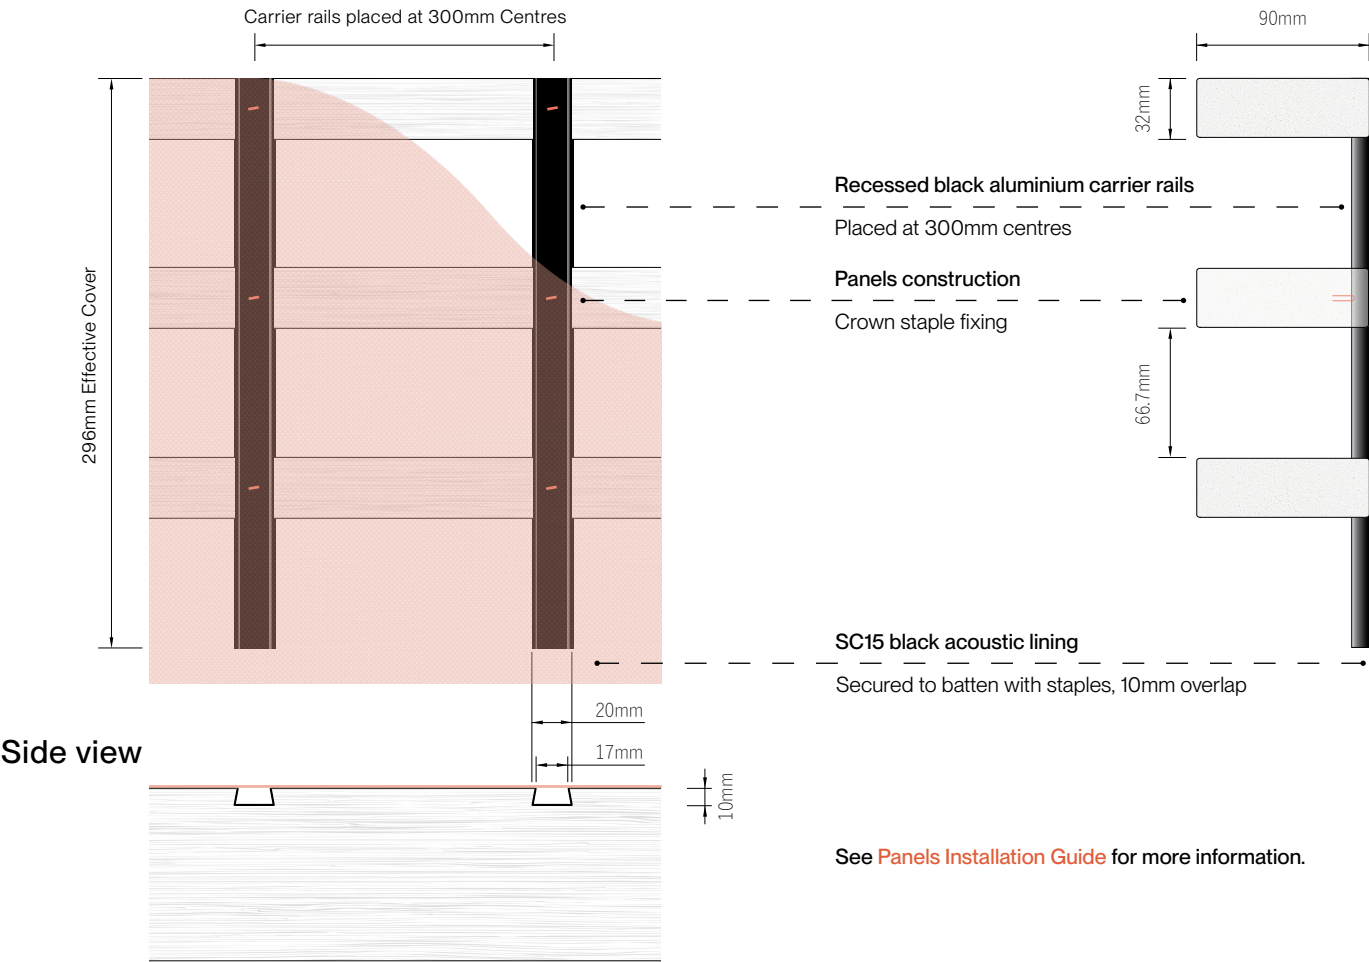

See [Panels Installation Guide](#) for more information.

Drawings not to scale.