

3040 Series

This prefinished and preassembled acoustic Panels system is meticulously engineered to empower visionary interior design and reduce reverberation in noise-sensitive environments.



Panels Solid Timber 3040-5 shown in Hemlock, Clear

How to Specify

Product	Screenwood Panels Solid Timber
Substrate	Hemlock, Blackbutt, Western Red Cedar, Spotted Gum
Fire	Group 3
Profile	3040-4 /3040-5 /3040-6
Length	Cut to specified size from lengths 0.9m - 3.6m
Finish	Select finish (e.g. Clear)

Certifications

Global GreenTag™ certified

Global GreenTag™ certified
GreenTag Level B and GreenTag
PHD Platinum HEALTH™.

PEFC™ Solid Timber

From environmentally certified Australian mills.

Low VOC

Exceeds GBCA requirements for commercial fitouts. Tested for organic emissions to ASTM D5116-2017.

Acoustic performance

Achieves NRC of up to 1.0 when installed as recommended.

Fire certified

Group 3 fire-rated, tested to AS5637.1.

 3040-4

 3040-5

 3040-6

Test results are available on request.




3040 Series

Standard set-outs

3040-4	Blade spacing	34mm				
	Weight	Hemlock	8.0kg/m ²	Western Red Cedar	5.7kg/m ²	
		Blackbutt	13.9kg/m ²	Spotted Gum	15.2kg/m ²	
3040-5	Blade spacing	19.2mm				
	Weight	Hemlock	9.9kg/m ²	Western Red Cedar	7.0kg/m ²	
		Blackbutt	17.2kg/m ²	Spotted Gum	18.8kg/m ²	
3040-6	Blade spacing	9.3mm				
	Weight	Hemlock	11.7kg/m ²	Western Red Cedar	8.3kg/m ²	
		Blackbutt	20.5kg/m ²	Spotted Gum	22.5kg/m ²	

Back view

End view

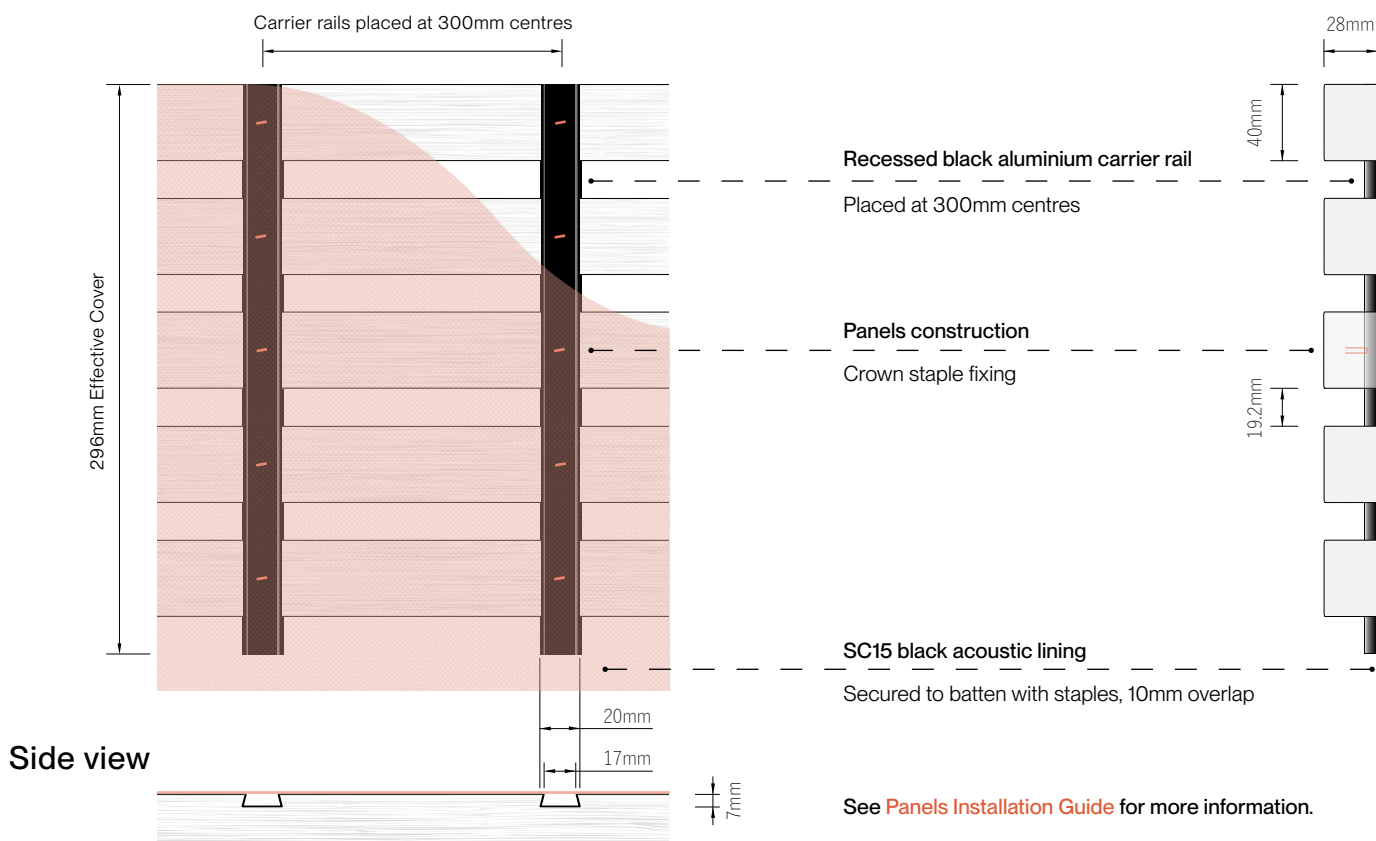

Drawings not to scale.