


3060 Series

This prefinished and preassembled acoustic Panels system is meticulously engineered to empower visionary interior design and reduce reverberation in noise-sensitive environments.

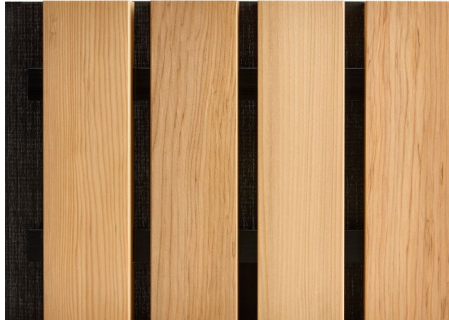

Panels Solid Timber 3060-4 shown in Hemlock, Clear

How to Specify

| | |
|------------------|--|
| Product | Screenwood Panels Solid Timber |
| Substrate | Hemlock, Blackbutt, Western Red Cedar, Spotted Gum |
| Fire | Group 3 |
| Profile | 3060-2 /3060-3 /3060-4 |
| Length | Cut to specified size from lengths 0.9m - 3.6m |
| Finish | Select finish (e.g. Clear) |

Certifications

Global GreenTag™ certified

Global GreenTag™ certified
GreenTag Level B and GreenTag
PHD Platinum HEALTH™.

PEFC™ Solid Timber

From environmentally certified Australian mills.

Low VOC

Exceeds GBCA requirements for commercial fitouts. Tested for organic emissions to ASTM D5116-2017.

Acoustic performance

Achieves NRC of up to 1.0 when installed as recommended.

Fire certified

Group 3 fire-rated, tested to AS5637.1.

 3060-2

 3060-3

 3060-4

Test results are available on request.




3060 Series

Standard set-outs

| | | | | | | |
|--------|---------------|-----------|-----------------------|-------------------|-----------------------|---|
| 3060-2 | Blade spacing | 88mm | | | |  |
| | Weight | Hemlock | 6.3kg/m ² | Western Red Cedar | 4.6kg/m ² | |
| | | Blackbutt | 10.9kg/m ² | Spotted Gum | 11.9kg/m ² | |
| 3060-3 | Blade spacing | 38.7mm | | | |  |
| | Weight | Hemlock | 9.2kg/m ² | Western Red Cedar | 6.6kg/m ² | |
| | | Blackbutt | 16.1kg/m ² | Spotted Gum | 17.6kg/m ² | |
| 3060-4 | Blade spacing | 14mm | | | |  |
| | Weight | Hemlock | 12.1kg/m ² | Western Red Cedar | 8.6kg/m ² | |
| | | Blackbutt | 21.2kg/m ² | Spotted Gum | 23.3kg/m ² | |

Back view

End view

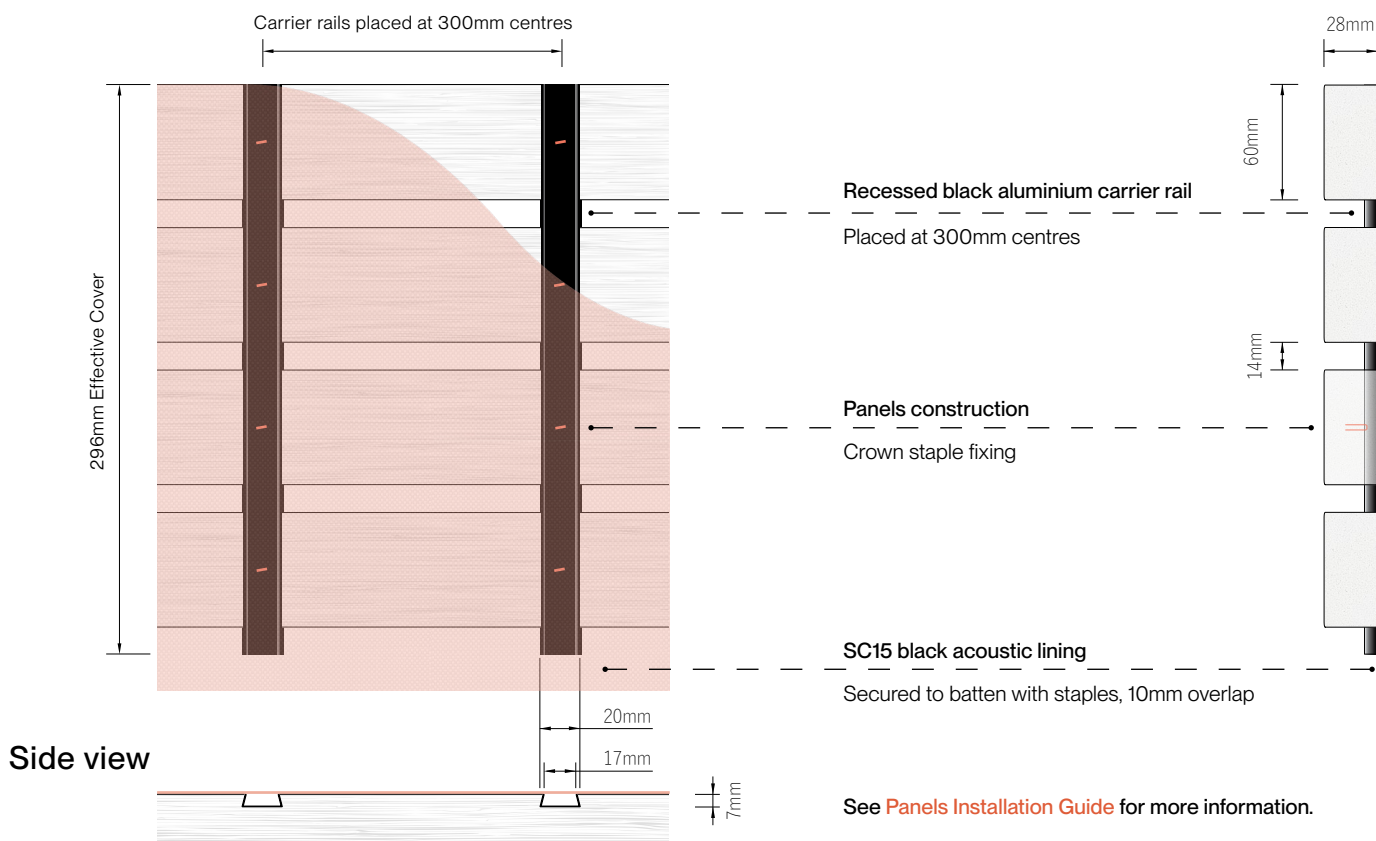

Drawings not to scale.