

4020 Series

This prefinished and preassembled acoustic Panels system is meticulously engineered to empower visionary interior design and reduce reverberation in noise-sensitive environments.



Panels Solid Timber 4020-8 shown in Hemlock, Clear

How to Specify

Product	Screenwood Panels Solid Timber
Substrate	Hemlock, Blackbutt, Western Red Cedar, Spotted Gum
Fire	Group 3
Profile	4020-6 /4020-7 /4020-8
Length	Cut to specified size from lengths 0.9m - 3.6m
Finish	Select finish (e.g. Clear)

Certifications

Global GreenTag™ certified

Global GreenTag™ certified
GreenTag Level B and GreenTag
PHD Platinum HEALTH™.

PEFC™ Solid Timber

From environmentally certified Australian mills.

Low VOC

Exceeds GBCA requirements for commercial fitouts. Tested for organic emissions to ASTM D5116-2017.

Acoustic performance

Achieves NRC of up to 1.0 when installed as recommended.

Fire certified

Group 3 fire-rated, tested to AS5637.1.



4020-6



4020-7



4020-8

Test results are available on request.




4020 Series

Standard set-outs

4020-6	Blade spacing	32.3mm				
	Weight	Hemlock	7kg/m ²	Western Red Cedar	5kg/m ²	
		Blackbutt	12.1kg/m ²	Spotted Gum	13.2kg/m ²	
4020-7	Blade spacing	25.3mm				
	Weight	Hemlock	8.1kg/m ²	Western Red Cedar	5.8kg/m ²	
		Blackbutt	14kg/m ²	Spotted Gum	15.3kg/m ²	
4020-8	Blade spacing	20mm				
	Weight	Hemlock	9.2kg/m ²	Western Red Cedar	6.5kg/m ²	
		Blackbutt	15.9kg/m ²	Spotted Gum	17.4kg/m ²	

Back view

End view

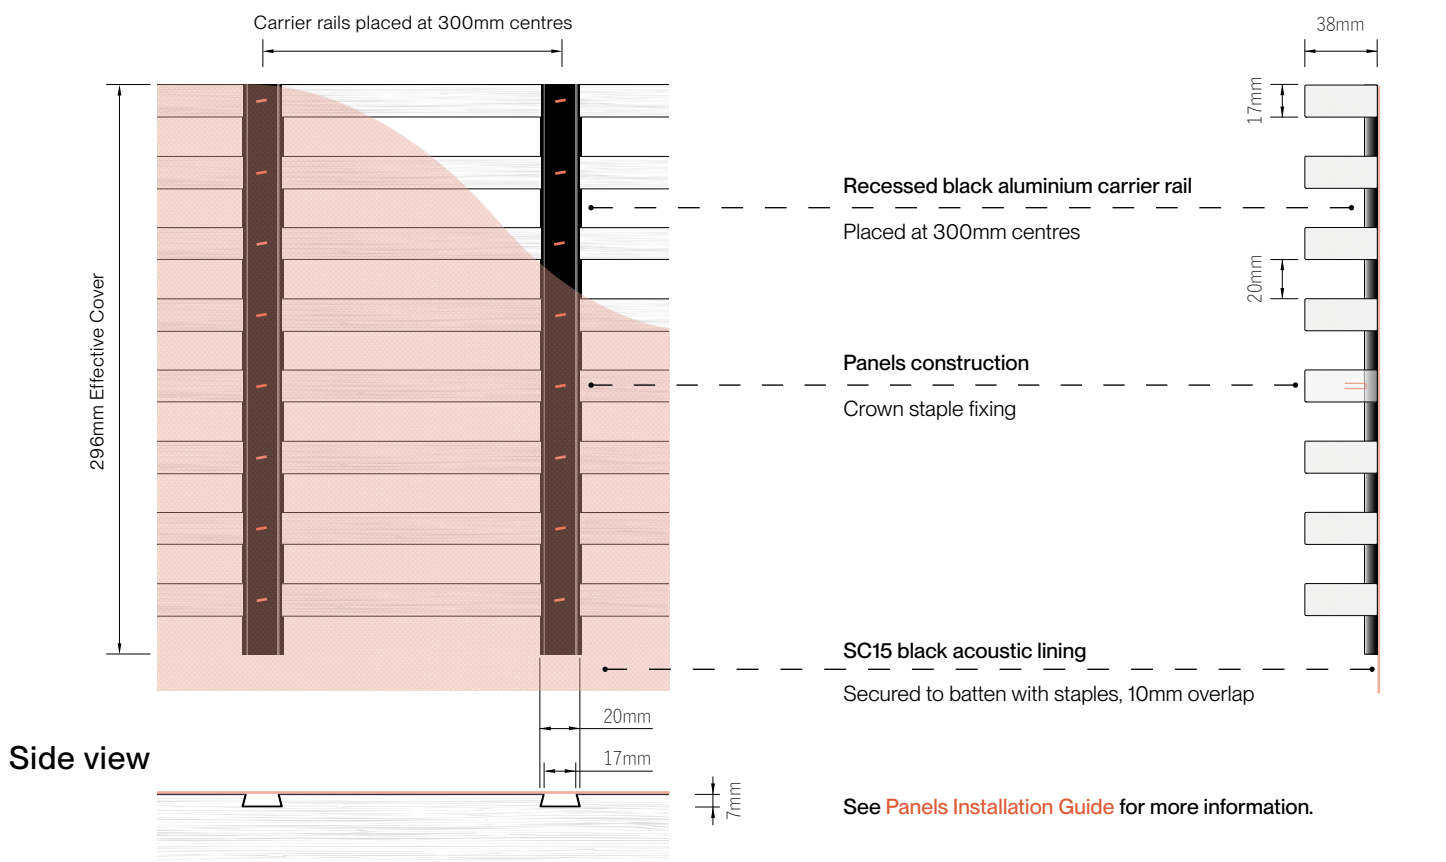

Drawings not to scale.