

# 6030 Series

This prefinished and preassembled acoustic Panels system is meticulously engineered to empower visionary interior design and reduce reverberation in noise-sensitive environments.




Panels Solid Timber 6030-5 shown in Hemlock, Clear

## How to Specify

Product	Screenwood Panels Solid Timber
Substrate	Hemlock, Blackbutt, Western Red Cedar, Spotted Gum
Fire	Group 3
Profile	6030-3 /6030-4 /6030-5
Length	Cut to specified size from lengths 0.9m - 3.6m
Finish	Select finish (e.g. Clear)

## Certifications

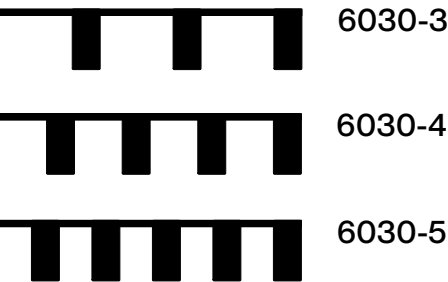

### Global GreenTag™ certified

Global GreenTag™ certified  
GreenTag Level B and GreenTag  
PHD Platinum HEALTH™.

### PEFC™ Solid Timber

From environmentally certified Australian mills.

### Low VOC

Exceeds GBCA requirements for commercial fitouts. Tested for organic emissions to ASTM D5116-2017.

### Acoustic performance

Achieves NRC of up to 1.0 when installed as recommended.

### Fire certified

Group 3 fire-rated, tested to AS5637.1.



# 6030 Series

## Standard set-outs

6030-3	Blade spacing	70.7mm				
	Weight	Hemlock	9.2kg/m <sup>2</sup>	Western Red Cedar	6.6kg/m <sup>2</sup>	
		Blackbutt	16.1kg/m <sup>2</sup>	Spotted Gum	17.6kg/m <sup>2</sup>	
6030-4	Blade spacing	46mm				
	Weight	Hemlock	12.1kg/m <sup>2</sup>	Western Red Cedar	8.6kg/m <sup>2</sup>	
		Blackbutt	21.2kg/m <sup>2</sup>	Spotted Gum	23.3kg/m <sup>2</sup>	
6030-5	Blade spacing	31.2mm				
	Weight	Hemlock	15kg/m <sup>2</sup>	Western Red Cedar	10.6kg/m <sup>2</sup>	
		Blackbutt	26.4kg/m <sup>2</sup>	Spotted Gum	29kg/m <sup>2</sup>	

## Back view

## End view

