

# 9040 Series

This prefinished and preassembled acoustic Panels system is meticulously engineered to empower visionary interior design and reduce reverberation in noise-sensitive environments.



Panels Solid Timber 9040-3 shown in Hemlock, Clear

## How to Specify

<b>Product</b>	Screenwood Panels Solid Timber
<b>Substrate</b>	Hemlock, Blackbutt, Western Red Cedar, Spotted Gum
<b>Fire</b>	Group 3
<b>Profile</b>	9040-2 /9040-3
<b>Length</b>	Cut to specified size from lengths 0.9m - 3.6m
<b>Finish</b>	Select finish (e.g. Clear)

## Certifications

### Global GreenTag™ certified

Global GreenTag™ certified  
GreenTag Level B and GreenTag  
PHD Platinum HEALTH™.

### Acoustic performance

Achieves NRC of up to 1.0 when  
installed as recommended.

### PEFC™ Solid Timber

From environmentally certified Australian  
mills.

### Fire certified

Group 3 fire-rated, tested to AS5637.1.

### Low VOC

Exceeds GBCA requirements for  
commercial fitouts. Tested for organic  
emissions to ASTM D5116-2017.



9040-2



9040-3


Test results are available on request.




# 9040 Series

## Standard set-outs

9040-2	Blade spacing	110mm			
	Weight	Hemlock	11.9kg/m <sup>2</sup>	Western Red Cedar	8.5kg/m <sup>2</sup>
		Blackbutt	19.7kg/m <sup>2</sup>	Spotted Gum	21.7kg/m <sup>2</sup>

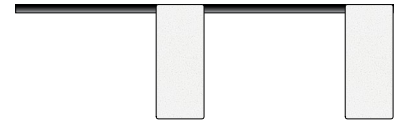


9040-3	Blade spacing	60.7mm			
	Weight	Hemlock	17.6kg/m <sup>2</sup>	Western Red Cedar	12.4kg/m <sup>2</sup>
		Blackbutt	29.3kg/m <sup>2</sup>	Spotted Gum	32.2kg/m <sup>2</sup>

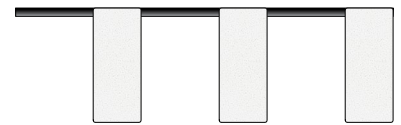

### Back view

### End view

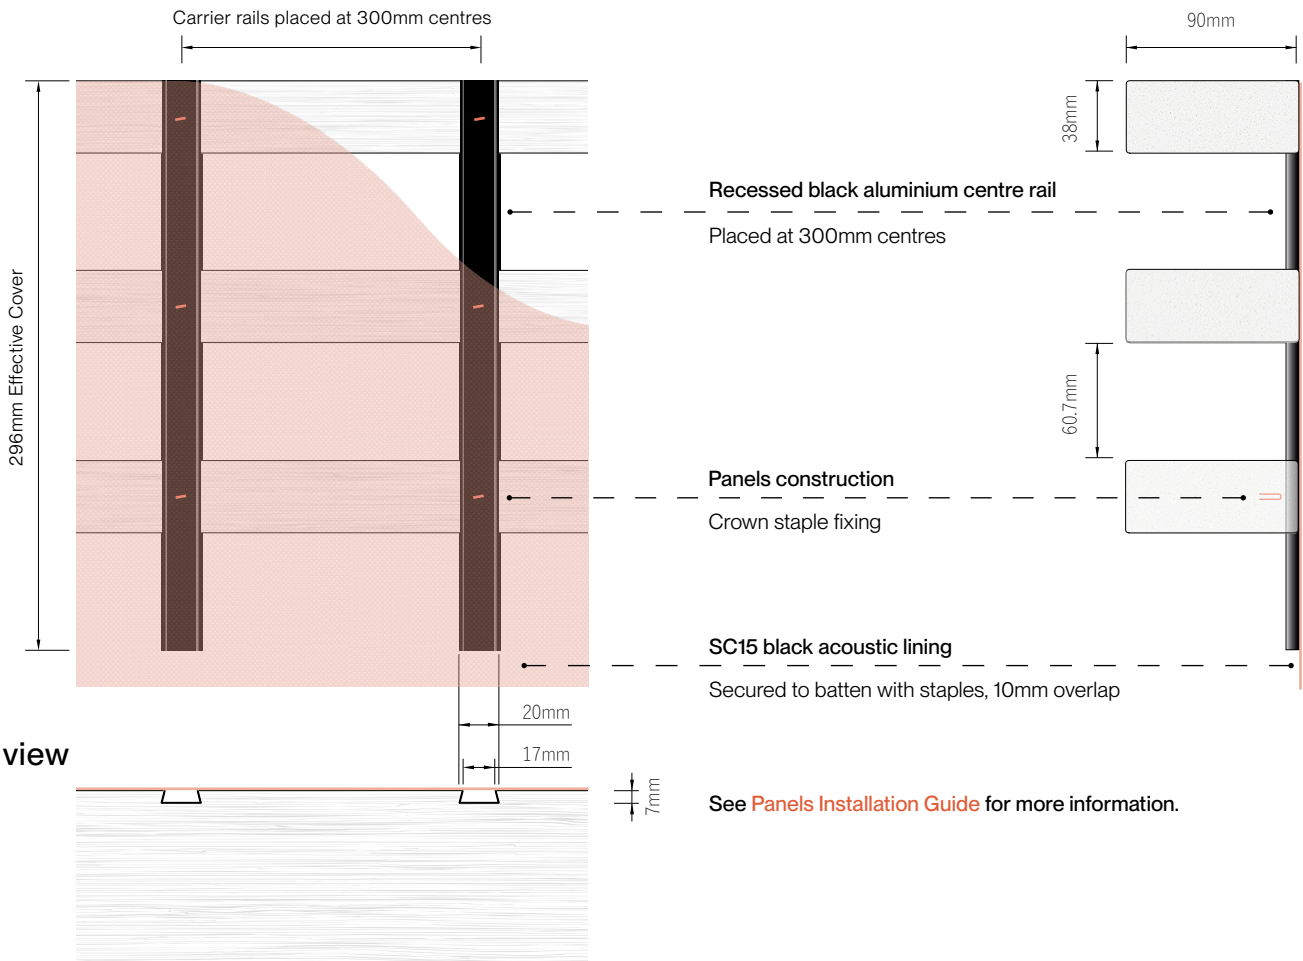

### Side view

Drawings not to scale.