

# Groove 75

For high occupancy or high fire-rated interiors, Modulo® Group 1 Groove 75 is outstanding for walls, ceilings and curves achieving a radius of 800mm.



Modulo® Group 1 Groove 75 shown in NAVURBAN™ Byron Blackbutt

## How to Specify

<b>Product</b>	Screenwood Modulo® Group 1
<b>Application</b>	Internal use only
<b>Substrate</b>	Aluminium
<b>Fire</b>	Group 1
<b>Profile</b>	Groove 75
<b>Length</b>	Available lengths: 2.7m, 3.6m, 5.4m
<b>Finish</b>	Select finish (e.g. NAVURBAN™ Byron Blackbutt)

## Certifications

### Fire certified

Group 1 fire-rated, tested to AS5637.1.

### Global GreenTag™ certified

Global GreenTag™ certified  
GreenTag Level B and GreenTag  
PHD Platinum HEALTH™.

### UV resistant

NAVURBAN™ tested for exposure in indoor applications to ASTM D4459.

### Resistant to wear

NAVURBAN™ tested for abrasion resistance to AS 1580.

### Light Reflective Value

NAVURBAN™ tested for exposure in indoor applications to AS/NZS 1428.1.

### Low VOC

Exceeds GBCA requirements for commercial fitouts. Tested for organic emissions to ASTM D5116-2017.


Test results are available on request.



# Groove 75

## Profile detail

7.5kg/m<sup>2</sup>

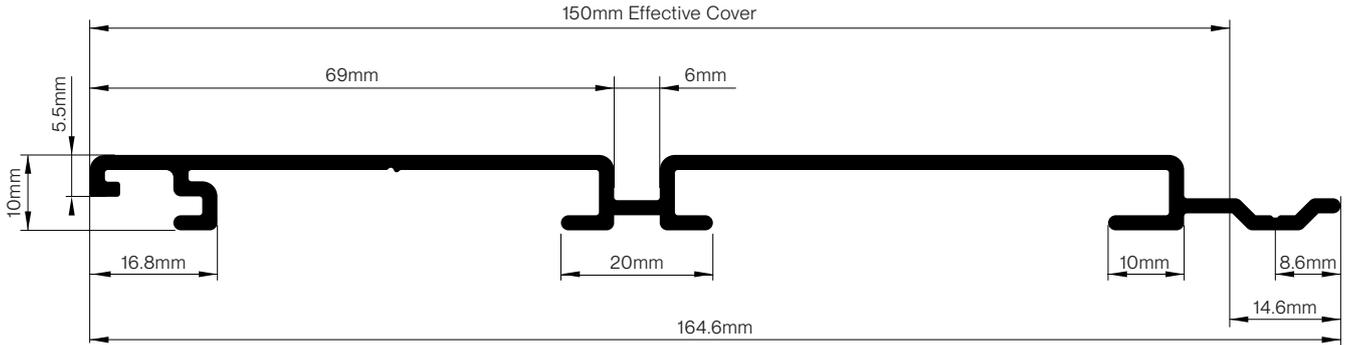

### Concave curve

800mm Curve Radius




### Convex curve

800mm Curve Radius



## Concealed screw installation of Modulo® Group 1

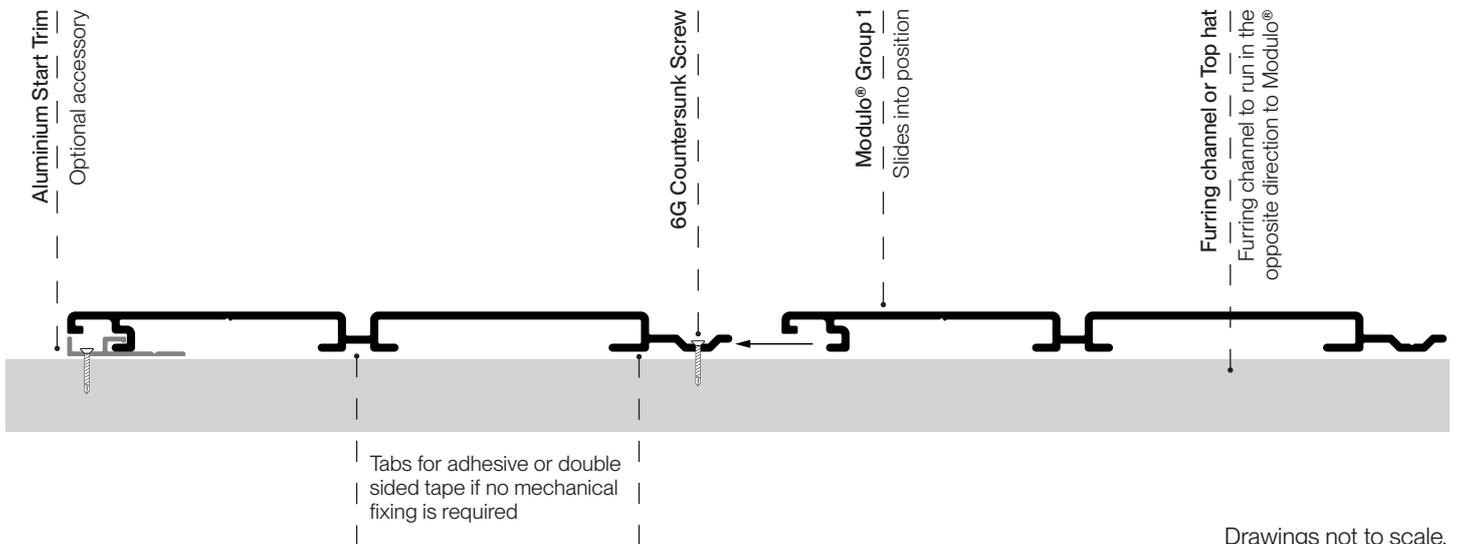

Drawings not to scale.

# Groove 75



Visit [screenwood.com.au/finishes](https://screenwood.com.au/finishes)

## Accessories

- Installation is simple with Screenwood start trim and external corner trim available to fit Modulo® Group 1 providing a professional finish.
- No costly componentry is required and can be combined with aluminium trims (supplied by others) to cap top and bottom edges if required.

## Ultra-realistic Finishes

Modulo® is profile wrapped in premium NAVURBAN™ non-PVC olefin decorative film with seamless finish matching across Screenwood and NAVURBAN™ products. Low VOC, UV and abrasion resistant, no ongoing maintenance and a large scale pattern to avoid pattern repeat. For the latest finishes, please visit [screenwood.com.au/finishes](https://screenwood.com.au/finishes).



Visit [screenwood.com.au/resources](https://screenwood.com.au/resources)

## Features

- For interior walls, ceilings and curves of up to 800mm radius
- Group 1 fire rated & Golbal GreenTag™ certified
- Prefinished in olefin film for an ultra-realistic finish
- Low VOC, UV and abrasion resistant
- Simple to install and no ongoing maintenance
- Easy to order with a fast manufacturing lead time
- Arrives in recyclable packaging
- Designed and made in Australia by Screenwood



**Need to know more?  
We're here to help.**

[hello@screenwood.com.au](mailto:hello@screenwood.com.au)  
+61 2 9521 7200  
[screenwood.com.au](https://screenwood.com.au)