PRODUCT SPECIFICATION

# Soundlina®

Group 1 perforated architectural wall covering for superior fire protection, high acoustic comfort, and aesthetics.



**Soundlina®** finished in NAVURBAN Diamond™

## How to Specify

| | |
|---|---|
| **Product** | Screenwood Soundlina® |
| **Application** | Internal use only |
| **Fire** | Group 1 |
| **NRC** | Up to 0.85 |
| **Substrate** | Perforated acoustic fabric* |
| **Roll Size** | 600mm x 9850mm |
| **Finish** | Select finish (e.g. NAVURBAN Diamond™ Toorak) |

## Certifications

### Global GreenTag™ certified

Global GreenTag™ certified to GreenRate Level B.

### Fire certified

Group 1 fire-rated, tested to AS/NZS 3837-1998.

### Acoustic performance

Tested to achieve up to 0.85 NRC when installed as recommended.

### Resistant to wear

NAVURBAN™ tested for abrasion resistance to AS 1580.

### Light Reflective Value

NAVURBAN™ tested for exposure in indoor applications to AS/NZS 1428.1.

### Low VOC

Exceeds GBCA requirements for commercial fitouts. Tested for organic emissions to ASTM D5116-2017.

### UV resistant

NAVURBAN™ tested for exposure in indoor applications to ASTM D4459.

**Test results are available on request.**

GOOD DESIGN AWARD® WINNER

*A non-acoustic wallpaper version of Soundlina® is available exclusively through our trusted partner, New Age Veneers.

Version 2

SCREEN WOOD

432 The Boulevarde
Kirrawee, NSW 2232

+61 2 9521 7200
hello@screenwood.com.au
screenwood.com.au

AUSTRALIAN MADE AND OWNED

PRODUCT SPECIFICATION

# Soundlina®

## Range Overview

**Effective cover** 5.91m²
**Weight** 360g/m²


Seaforth


Cremorne


Balmoral


Albany Oak


The Oaks


White Mountain Oak


Classic American Oak*



Tablelands


Byron Blackbutt


Box Wood


Toorak

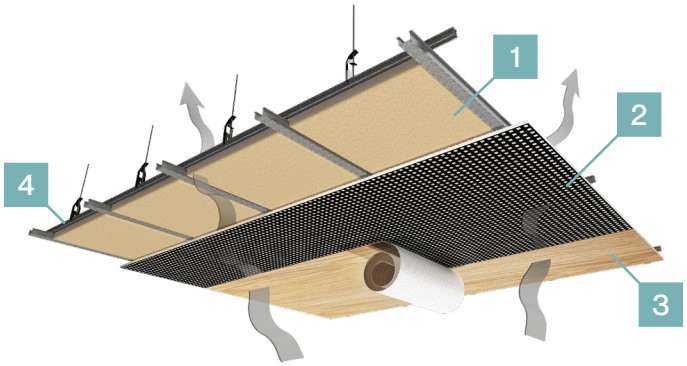

Birchgrove


Nutgrove


Black Mountain

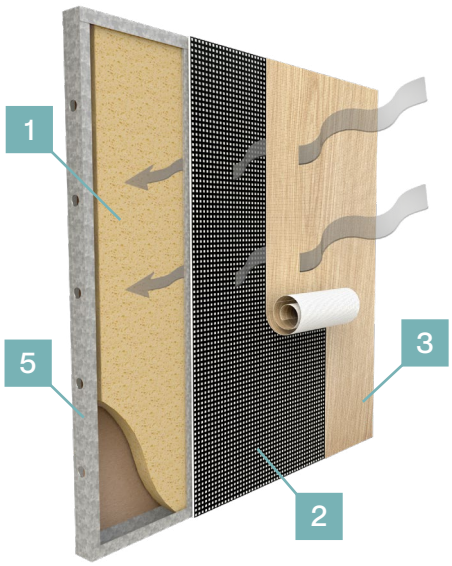
*Pattern matching required for Classic American Oak as woodgrain features crown.

## Ceiling installation




1. Acoustic insulation
2. Perforated plasterboard (painted black)
3. Soundlina® perforated wall covering
4. Suspended ceiling system
5. Stud wall

## Wall installation




Achieves 0.85 NRC when installed as recommended. For Installation Guide, visit screenwood.com.au/resources.

SCREEN WOOD

432 The Boulevarde
Kirrawee, NSW 2232

+61 2 9521 7200
hello@screenwood.com.au
screenwood.com.au

AUSTRALIAN MADE AND OWNED